

LET'S CELEBRATE THE BRIGHTER SIDE OF LIFE



CONSUMER LIGHTING PRODUCT CATALOGUE
DECEMBER 2023

WHY ORIENT?

ONE STOP BRAND FOR ELECTRICAL LIFESTYLE SOLUTIONS

Life is hectic. But when it comes to choosing lifestyle appliances, we make it a simple task. For, you just need to rely on one name to find the right kind of appliances for your home. Orient Electric.

A distinguished name in the consumer electrical space for more than 65 years, Orient Electric has established itself as a one-stop provider of fans, lighting, home appliances, switchgears and other electrical solutions.

Speaking of range and presence, we have the widest range of products meeting domestic and international needs with presence in over 40 international markets, and in the domestic market, we have a well-organised distribution network reaching 1,25,000 retail outlets and a strong service network covering more than 450 cities. We have state-of-the-art manufacturing facilities at Faridabad, Noida and Kolkata, which enable us to manufacture consumer-centric, first-to-market products with best-in-class quality and performance.

We take pride in our R&D capabilities, spirit of continuous innovation, and commitment to manufacturing cutting-edge lifestyle electrical solutions. As a trusted brand, our endeavour is not just to adapt but to unravel the latent consumer needs and meet them with apt solutions that make life simpler and experiences better.

Over the years, we have been widely recognised for our product innovations, manufacturing prowess, and excellent customer service. Orient Electric is a consumer validated 'Superbrand.' For, nothing makes us happier than to see a satisfied you.



FELICITATIONS THAT SPUR US ON



Superbrand India, 2023



ET-Best Brand Award, 2021



National Energy Conservation Award, 2021



Icon of the Year, 2015



Make in India Award for Excellence, 2015



Global Quality, 2015



Star Performer, 2011-2012

SALIENT FEATURES & BENEFITS OF THE



TECHNOLOGY



HIGH POWER FACTOR
Power factor more than 0.90



FLICKER CONTROLLED
PRODUCTS*



HIGH LIGHT OUTPUT
2 times brighter than conventional
light sources of similar wattage



UNIFORM LIGHT
DISTRIBUTION



Wi-Fi ENABLED*



RGB LIGHTS*
16 Million Colours

*Available on selected products.




SMART LED LIGHT RANGE

ORISMART LED LAMP

OriSmart LED Lamp gives 16 million colour options to light up your home as per your mood. Now you can control lights from anywhere with Orient Smart App and can operate similar products together.

Details	Orismart LED lamp
Rated Wattage	10 W
Lumen	850
Holder Base	B22d
Power Factor	>0.9
Colour Temperature	16million RGB color
CRI	>80
Housing	Thermoplastic
Protection Class	IP 20
MRP (₹)	2000
Std. Pkg.	20

Rated Wattage	Length (A)	Width (B)
10W	130	65
All dimensions are in mm		

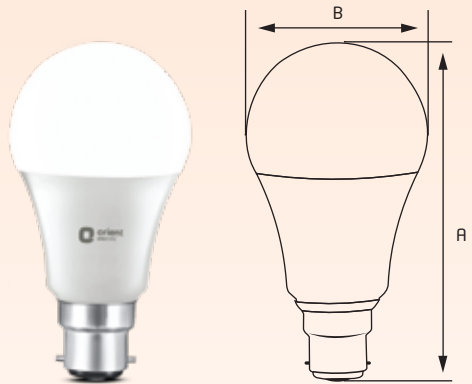

Wi-Fi Enabled



Operate via
Orient Smart App



Compatible with
Amazon Alexa
& Google Home



RGB Lights
16 Million
Colours



Brightness
Control: 1-100%



Operate Similar
Lamps Together

APPLICATIONS



Home



Offices



Retail Shops




Showrooms

ORISMART LED BATTEN

OriSmart LED Batten helps you adjust your home's light as per your mood. Now you can control lights from anywhere with Orient Smart App and can operate similar products together.

Details	Orismart LED Batten
Rated Wattage	20 W
Lumen	2000
Power Factor	>0.90
Colour Temperature	3000K - 6500K
CRI	>80
Housing	Polycarbonate
Protection Class	IP 20
MRP (₹)	2500
Std. Pkg.	20

Rated Wattage	Length (A)	Width (B)	Height (C)
20W	1185	24	37
All dimensions are in mm			

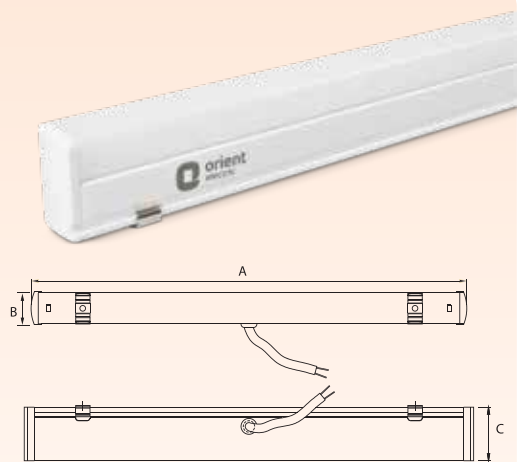

Wi-Fi Enabled



Operate via
Orient Smart App



Compatible with
Amazon Alexa
& Google Home



3000K to
6500K CCT



Brightness
Control: 1-100%



Operate Similar
Batten Together

APPLICATIONS



Home



Offices



Retail Shops



Showrooms

FLICKER CONTROLLED LED RANGE

FLICKER IN LED LIGHTS IS NOT VISIBLE.
BUT IT AFFECTS EYE HEALTH.




EYELUV LED LAMP

EYELUV LED lamp comes with revolutionary FCT (Flicker Control Technology) which reduces harmful invisible flickers present in light that causes eye strain, eye-fatigue, and many other eye-health complications.

Details	EYELUV LED Lamp
Rated Wattage	9W
Lumen	900
Power Factor	>0.90
Colour Temperature	6500K / 3000K
CRI	>80
Protection Class	IP 20
Base	B22d/E27
Beam Angle	>180°
MRP (₹)	300
Std. Pkg.	25

Rated Wattage	Length (A)	Width (B)
9W	112	60
All dimensions are in mm		

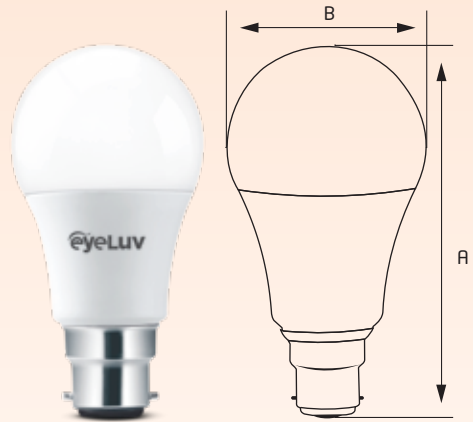

IT'S INVISIBLE. BUT HERE S
HOW TO SEE IT.

- 1 Open your smartphone camera in slow-motion video mode.
- 2 Point the camera towards the lights & check for flicker.

APPLICATIONS



Home



Offices



School



Showrooms




Colleges

EYELUV LED BATTEN

EYELUV LED batten comes with revolutionary FCT (Flicker Control Technology) which reduces harmful invisible flickers present in light that causes eye strain, eye-fatigue, and many other eye-health complications.

Details	EYELUV LED Batten
Rated Wattage	20W
Lumen	2000
Power Factor	>0.90
Colour Temperature	6500K / 3000K
CRI	>80
Protection Class	IP 20
Beam Angle	>120°
MRP (₹)	700
Std. Pkg.	20

Rated Wattage	Length (A)	Width (B)	Height (C)
20W	1100	24	32
All dimensions are in mm			

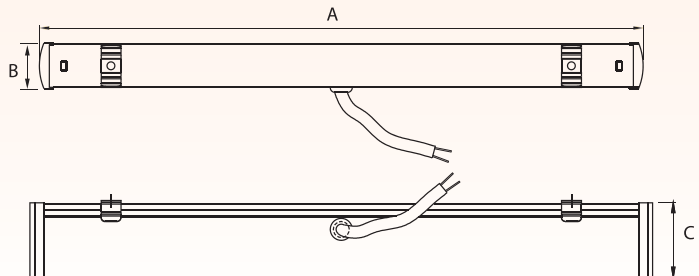

APPLICATIONS



Home



Offices



Showrooms



Colleges

EYELUV


LED DOWNLIGHTER

EYELUV LED downlighter comes with revolutionary FCT (Flicker Control Technology) which reduces harmful invisible flickers present in light that causes eye strain, eye-fatigue, and many other eye-health complications.

Details	EYELUV LED Downlighter
Rated Wattage	5W
Shape	Round
Lumen	450
Power Factor	>0.90
Cut-Out Size	Ø75mm
Colour Temperature	6500K / 3000K
MRP (₹)	500
Std. Pkg.	20

Rated Wattage	Length (A)	Width (B)	Height (C)
5W	110	47	75

All dimensions are in mm

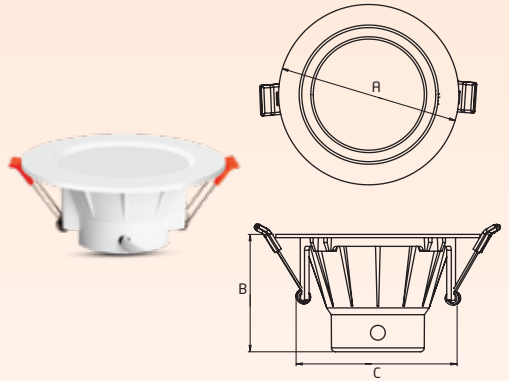

APPLICATIONS



Home



Offices



Showrooms





Colleges

EYELUV

RECESS PANEL-BACKLIT

EYELUV LED panel comes with revolutionary FCT (Flicker Control Technology) which reduces harmful invisible flickers present in light that causes eye strain, eye-fatigue, and many other eye-health complications.

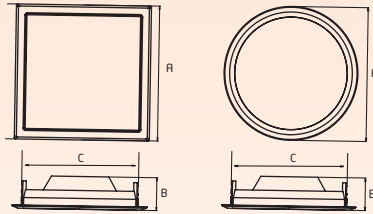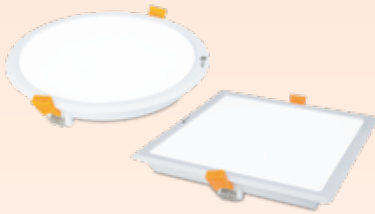

Details	EYELUV Recess Panel - Backlit		
Rated Wattage	10W	15W	20W
Lumen	1000	1500	2000
Power Factor	>0.90	>0.90	>0.90
Shape	Square/Round	Square/Round	Square/Round
Housing	Plastic	Plastic	Plastic
Cut Out Size	Ø105mm	Ø150mm	Ø205mm
Colour Temperature	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K
CRI	>80	>80	>80
Protection Class	IP 20	IP 20	IP 20
MRP (₹)	750	850	1300
Std. Pkg.	20	20	10

Square

Rated Wattage	Length (A)	Width (B)	Cut-Out (C)
10W	116x116	36	105x105
15W	166x166	36	150x150
20W	220x220	36	205x205

All dimensions are in mm

Round

Rated Wattage	Length (A)	Width (B)	Cut-Out (C)
10W	116	36	105
15W	166	36	150
20W	220	36	205

All dimensions are in mm

APPLICATIONS



Home



School



Showrooms



Colleges

EYELUV



LED PANEL 2x2

EYELUV LED panel comes with revolutionary FCT (Flicker Control Technology) which reduces harmful invisible flickers present in light that causes eye strain, eye-fatigue, and many other eye-health complications.

Details	EYELUV LED Panel 2x2
Rated Wattage	36W
Lumen	3600
Power Factor	>0.90
Shape	Square
Housing	CRCA
Cut Out Size	575x575
Color Temperature	6500K / 4000K / 3000K
CRI	>80
Protection Class	IP 20
MRP (₹)	4000
Std. Pkg.	4

Rated Wattage	Length (A)	Height (B)	Cut-Out (C)
36W	595x595	36	575x575

All dimensions are in mm



APPLICATIONS



Home



Offices



School



Showrooms



Colleges



Mall



Power gone?



Lights ON!



EMERGENCY LED
LIGHT RANGE

EMERGENCY LED LAMP

Emergency LED Lamp gets automatically switched ON during a power cut and runs effectively up to 3 hrs . Thus, avoiding any interruptions during power cut.

Details	Emergency LED Lamp			
Rated Wattage	8W	9W	12W	15W
Lumen (AC)	800	900	1200	1500
Lumen (DC)	300	350	450	525
Power Factor	>0.90	>0.90	>0.90	>0.90
Colour Temperature	6500K	6500K	6500K	6500K
CRI	>80	>80	>80	>80
Base	B22d	B22d	B22d	B22d
Housing	Thermoplastic	Thermoplastic	Thermoplastic	Thermoplastic
Protection Class	IP 20	IP 20	IP 20	IP 20
MRP (₹)	750	950	1150	1350
Std. Pkg.	20	20	20	20

Rated Wattage	Length (A)	Width (B)
8W	120	60
9W	140	70
12W 15W	140	70

All dimensions are in mm




Emergency backup upto 3 hrs



Automatic battery charging



Overcharging & deep discharge battery protection

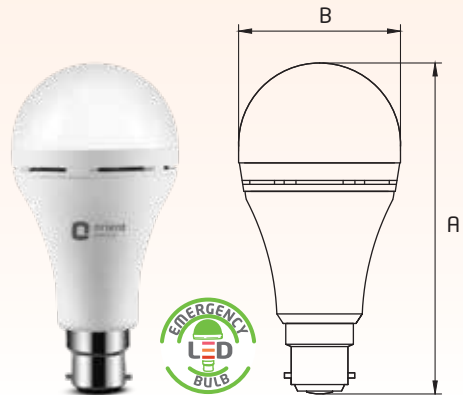

APPLICATIONS



Home



Offices

EMERGENCY LED BATTEN

Emergency LED batten gets automatically switched ON during a power cut and runs effectively up to 3 hrs . Thus, avoiding any interruptions during power cut.

Details	Emergency LED Batten	
Rated Wattage	10W	20W
Lumen (AC)	1000	2000
Lumen (DC)	350	500
Power Factor	>0.90	>0.90
Colour Temperature	6500K	6500K
CRI	>80	>80
Housing	Polycarbonate	Polycarbonate
Protection Class	IP 20	IP 20
MRP (₹)	500	1000
Std. Pkg.	20	10

Rated Wattage	Length (A)	Width (B)	Cut-Out (C)
10W	598	24	37
20W	1100	24	37

All dimensions are in mm




Emergency backup upto 3 hrs



Automatic battery charging



Overcharging & deep discharge battery protection

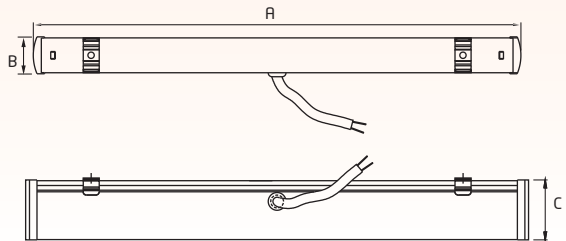

APPLICATIONS



Home



Offices


EMERGENCY LED PANEL

Emergency LED Panel gets automatically switched ON during a power cut and runs effectively up to 3 hrs . Thus, avoiding any interruptions during power cut.

Details	Emergency LED Panel
Rated Wattage	10W
Lumen (AC)	900
Lumen (DC)	350
Shape	Round
Power Factor	>0.90
Cut-Out Size	105mm
Colour Temperature	6500K
CRI	>80
Housing	Polycarbonate
Protection Class	IP 20
MRP (₹)	1000
Std. Pkg.	20

Rated Wattage	Length (A)	Height (B)	Cut-Out (C)
10W	116	36	105

All dimensions are in mm

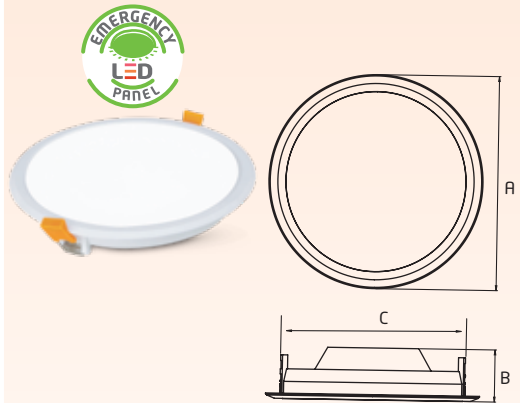

Emergency backup upto 3 hrs



Automatic battery charging



Overcharging & deep discharge battery protection

APPLICATIONS



Home



Offices



Retail Shops



Showrooms




LED LAMP RANGE

DECO SHINE LED NIGHT LAMP

DECO LED Lamp is the perfect solution to use it as a night lamp, consuming negligible power even if you keep it ON for the whole night.

Details	Deco Shine LED - Night Lamp
Rated Wattage	0.5W
Housing	Polycarbonate
Protection Class	IP 20
Colour	White, Yellow, Green, Red, Pink, Blue
Base/Cap	B22d
MRP (₹)	60
Std. Pkg.	48

Rated Wattage	Length (A)	Width (B)
0.5W	70	45
All dimensions are in mm		

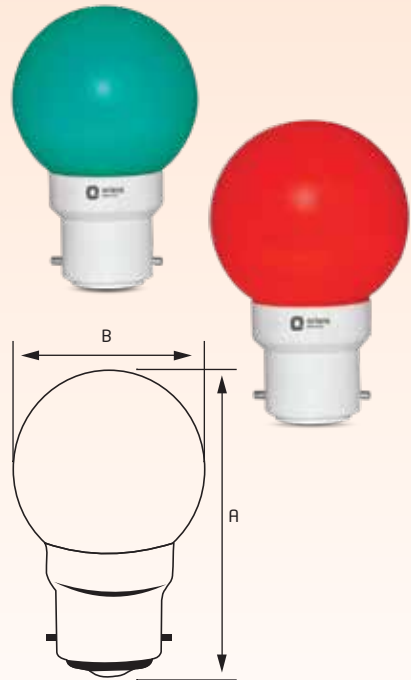

APPLICATIONS



Home



Offices

DECO


● PLUG LED NIGHT LAMP

DECO Plug LED Lamp is the perfect solution as a night lamp, you just need to plug it in your existing 2-pin socket. It consumes negligible power, even if you keep it ON for the whole night.

Details	Deco Plug LED - Night Lamp
Rated Wattage	0.5W
Housing	Polycarbonate
Protection Class	IP 20
Colours	White, Yellow, Green, Red, Pink, Blue & Pink
MRP (₹)	95
Std. Pkg.	48

Rated Wattage	Length (A)	Width (B)	Height (C)
0.5W	68	45	70

All dimensions are in mm

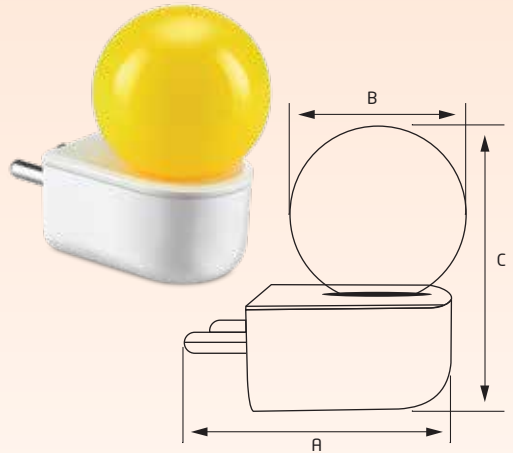

APPLICATIONS



Home



Offices


DECO

RAINBOW LED NIGHT LAMP

DECO Rainbow LED Lamp is the perfect solution to decorate your home as it changes colour automatically into seven primary colours and can be used as a night lamp.

Details	Deco Rainbow LED - Night Lamp
Rated Wattage	0.5W
Housing	Polycarbonate
Protection Class	IP 20
Colour Temperature	Auto Colour Changing (7 Primary Colours)
Base	B22d
MRP (₹)	99
Std. Pkg.	48

Rated Wattage	Length (A)	Width (B)
0.5W	70	45
All dimensions are in mm		

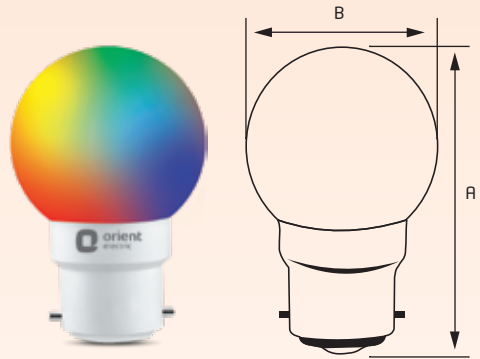

7 Automatic colour changes in single bulb

Violet, Indigo, Blue, Green
Yellow, Orange & Red

APPLICATIONS



Home



Offices

LED LAMP


HIGH GLO

High Glo LED Lamps come with 180° beam angle which provides more brightness with wider light spread. It complies with BEE 1-Star Rating.


Details	LED Lamp - High Glo			
Rated Wattage	3W	5W	7W	9W
Lumen	300	500	700	900
Power Factor	>0.9	>0.9	>0.9	>0.9
Colour Temperature	3000K/6500K	3000K/6500K	3000K/6500K	3000K/6500K
CRI	>80	>80	>80	>80
Beam angle	180°	180°	180°	180°
Base	B22d/E27	B22d/E27	B22d/E27	B22d/E27
MRP (₹)	140	150	160	180
Std. Pkg.	60	60	60	60

Rated Wattage	Length (A)	Width (B)
3W	98	51
5W 7W	100	55
9W	115	60


All dimensions are in mm



Normal LED Bulb



High GLO LED Bulb

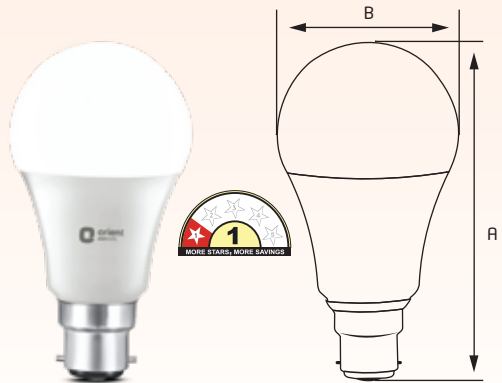

APPLICATIONS



Home



Shops



General Purpose Lighting

LED LAMP


HIGH GLO

High Glo LED Lamp comes with 180° beam angle which provides more brightness with wider light spread. It complies with BEE 2-Star Rating.


Details	LED Lamp - High Glo					
Rated Wattage	7W	8W	9W	10W	12W	15W
Lumen	805	840	1035	1050	1260	1575
Power Factor	>0.90	>0.90	>0.90	>0.90	>0.90	>0.90
Colour Temperature	3000K/6500K	3000K/6500K	3000K/6500K	3000K/6500K	3000K/6500K	3000K/6500K
CRI	>80	>80	>80	>80	>80	>80
Beam Angle	180°	180°	180°	180°	180°	180°
Base	B22d/E27	B22d/E27	B22d/E27	B22d/E27	B22d/E27	B22d/E27
MRP (₹)	160	175	180	200	300	350
Std. Pkg.	60	60	60	60	60	60

Rated Wattage	Length (A)	Width (B)
8W	100	55
7W 9W	115	60
10W	112	60
12W	120	65
15W	120	65


All dimensions are in mm



Normal LED Bulb



High GLO LED Bulb

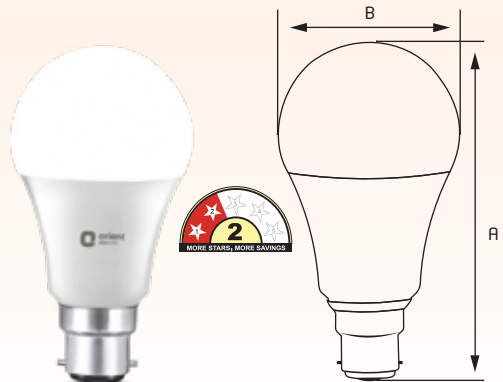

APPLICATIONS



Home



Offices



General Purpose
Lighting

LED LAMP


● ETERNAL SHINE (18W-26W)

High Wattage-LED Lamp comes with an advanced lighting solution that offers more brightness with wider light spread and saves 80% more energy than the traditional incandescent bulbs.

Details	LED Lamp - Eternal Shine		
Rated Wattage	18W	23W	26W
Lumen	1800	2300	2600
Power Factor	>0.90	>0.90	>0.90
Colour Temperature	3000K/6500K	3000K/6500K	3000K/6500K
CRI	>80	>80	>80
Beam Angle	>240°	>240°	>240°
Protection Class	IP 20	IP 20	IP 20
Base	B22d/E27	B22d/E27	B22d/E27
MRP (₹)	425	600	650
Std. Pkg.	20	20	20

Rated Wattage	Length (A)	Width (B)
18W	150	80
23W 26W	140	80

All dimensions are in mm

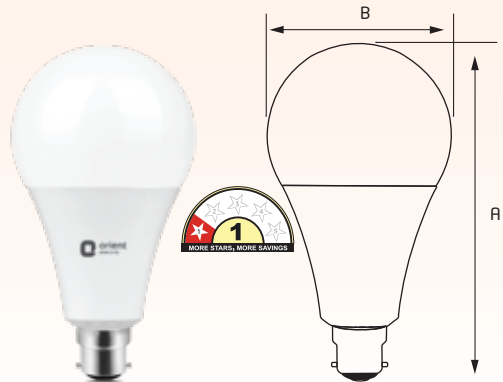

APPLICATIONS



Home



Offices



General Purpose
Lighting

LED LAMP


● ETERNAL SHINE (30W-60W)

HIGH Wattage-LED Lamp comes with an advanced lighting solution that offers more brightness with wider light spread and saves 80% more energy than the traditional incandescent bulbs.

Details	LED Lamp - Eternal Shine			
Rated Wattage	30W	40W	50W	60W
Lumen	3000	4000	5000	6000
Power Factor	>0.90	>0.90	>0.90	>0.90
Colour Temperature	3000K / 6500K	3000K / 6500K	3000K / 6500K	6500K
CRI	>80	>80	>80	>80
Beam Angle	120°	120°	120°	120°
Protection Class	IP 20	IP 20	IP 20	IP 20
Base	B22d/E27	B22d/E27	B22d/E27	B22d/E27
MRP (₹)	700	800	1200	1600
Std. Pkg.	10	10	10	10

Rated Wattage	Length (A)	Width (B)
30W	170	100
40W	195	120
50W	220	140
60W	220	140

All dimensions are in mm

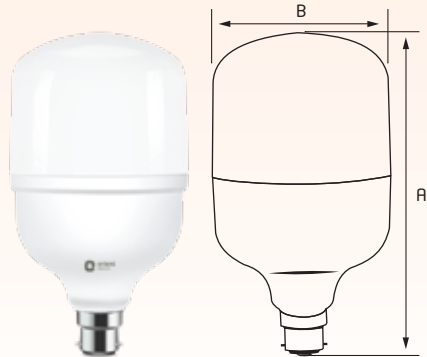

APPLICATIONS



Home



Offices



Shops



General Purpose
Lighting



SPECIAL LED LAMP RANGE


LED LAMP

● HIGH GLO RBP

High Glo RBP LED BULB decorates your home with 3 different colour options - Red, Blue, Pink in the same Bulb. You can change the colour as per your mood with the help of ON-OFF switch.

Details	LED Lamp - High Glo RBP
Rated Wattage	7W
Power Factor	>0.90
Colour Temperature	3 in 1 (Red, Blue & Pink)
Base	B22d/E27
Beam Angle	180°
MRP (₹)	250
Std. Pkg.	25

Rated Wattage	Length (A)	Width (B)
7W	110	60
All dimensions are in mm		

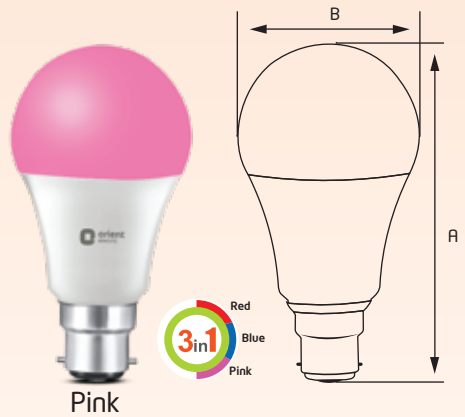

Pink



Red



Blue

APPLICATIONS



Home



Offices



Restaurants

LED LAMP


● 3 in 1 (MOODLIGHT)

Moodlight LED Lamp is designed to provide light in 3 different colour options - Cool White (6500K), Neutral White (4000K), and Warm White (3000K) in the same lamp. You can change the colour as per your mood with the help of ON-OFF switch.

Details	LED Lamp - 3 in 1 (Moodlight)
Rated Wattage	9W
Lumen	900
Power Factor	>0.90
Colour Temperature	3 in 1 (6500K/4000K/3000K)
CRI	>80
Protection Class	IP 20
Base	B22d
MRP (₹)	225
Std. Pkg.	60

Rated Wattage	Length (A)	Width (B)
9W	110	60

All dimensions are in mm

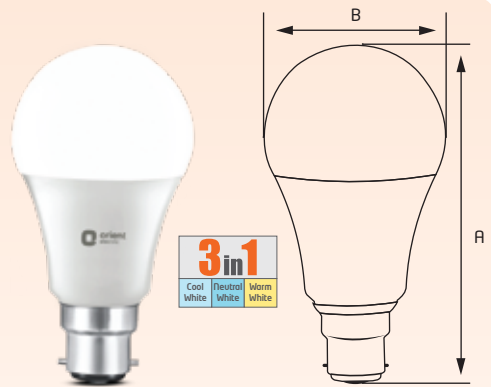

White



Neutral White



Warm White

APPLICATIONS



Home



Offices



Shops



Restaurants

LED LAMP


DECORATIVE

Decorative LED Lamp decorates every corner of your home and have multiple usages as in chandelier, table lamp, wall lamps etc. These lamps can be easily fitted in normal (B22) and screw (E27 & E14) holder as per requirement.

Details	LED Lamps - Decorative		
Rated Wattage	2.7W	4.5W	4.5W
Lumen	270	450	450
Power Factor	>0.90	>0.90	>0.90
Colour Temperature	6500K/3000K	6500K/3000K	6500K/3000K
CRI	>80	>80	>80
Protection Class	IP 20	IP 20	IP 20
Base	E14	E27/B22d	E27/B22d
MRP (₹)	250	275	275
Std. Pkg.	50	50	50

Rated Wattage	Length (A)	Width (B)
2.7W Candle Lamp	106	36
4.5W Candle Lamp	95	50
4.5W Pigmy Lamp	95	50

All dimensions are in mm

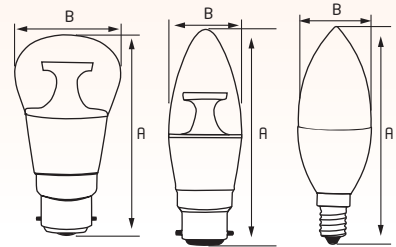

APPLICATIONS



Home



Offices



Restaurants



General Purpose
Lighting


LED LAMP

MOTION SENSOR

Motion Sensor LED Lamp switches ON by sensing any movement within a range of 15ft and switches off automatically when no motion is detected for 2 min.

Details	Motion Sensor LED Lamp
Rated Wattage	10W
Lumen	900
Power Factor	>0.90
Colour Temperature	6500K
CRI	>80
Protection Class	IP 20
Base	B22d
MRP (₹)	400
Std. Pkg.	25

Rated Wattage	Length (A)	Width (B)
10W	110	60
All dimensions are in mm		

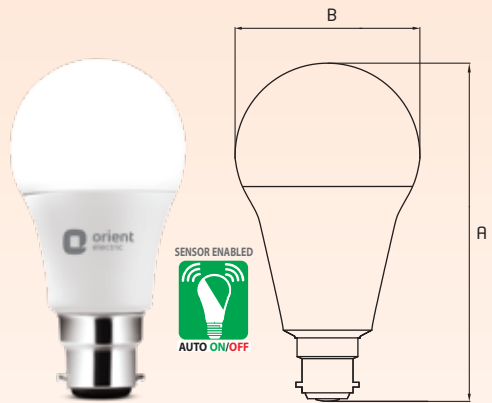

Stays OFF when no movement detected



Auto ON when it Senses any movement within 15 ft range



Auto OFF after 2 minutes if no movement detected

APPLICATIONS



Staircase



Balconies



Store Room



Parking Area



Bathroom



LED BATTEN RANGE

LED BATTEN


GRACE DELITE

Grace Delite LED Batten offers modern lighting solutions as per your need and is 60% more efficient than traditional fluorescent tube lights, it comes with plastic housing for better aesthetics.




Details	LED Batten Grace Delite							Grace PRO Batten
Rated Wattage	5W	10W	20W	22W	24W	36W	20W	
Lumen	450	1000	2000	2200	2400	4000	2000	
Power Factor	>0.90	>0.90	>0.90	>0.90	>0.90	>0.90	>0.90	
Colour Temperature	3000K, 4000K, 6500K	3000K, 4000K, 6500K	3000K, 4000K, 6500K, Red/Blue/Green/Pink	3000K, 4000K, 6500K	3000K, 4000K, 6500K	3000K, 4000K, 6500K	3000K, 4000K, 6500K	3000K, 4000K, 6500K Red/Blue/Green
CRI	>80	>80	>80	>80	>80	>80	>80	>80
Shape	Square	Square	Square	Square	Square	Mushroom	Square	
Protection Class	IP 20	IP 20	IP 20	IP 20	IP 20	IP 20	IP 20	
Housing	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	
MRP (₹)	300	450	600	650	650	800	550	
Std. Pkg.	20	20	20	20	20	20	30	

Rated Wattage	Length (A)	Width (B)	Height (C)
5W	300	24	37
10W	600	24	37
20W - Grace PRO	1100	20	29
20W	1185	24	32
22W	1100	24	37
24W	1185	24	37
36W	1185	33	40

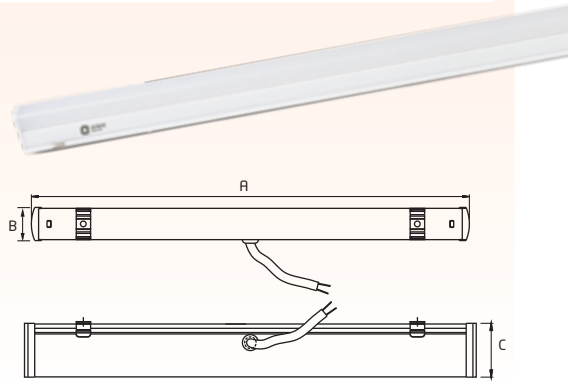All dimensions are in mm



APPLICATIONS

- 
Home
- 
Offices
- 
Shops
- 
Restaurants


LED BATTEN SUNLIGHT

Grace Sunlight LED Batten offers modern lighting solutions as per your need and is 60% more efficient than traditional fluorescent tube lights, it comes with aluminium housing for better heat management during long burning hours.

Details	LED Batten Square				
Rated Wattage	20W (2 feet)	24W	28W	40W	48W
Lumen	2000	2400	2800	4000	5000
Power Factor	>0.90	>0.90	>0.90	>0.90	>0.90
Colour Temperature	6500K	6500K	6500K	6500K/3000K	6500K
CRI	80	>80	>80	>80	>80
Shape	Square	Square	Square	Square	Square
Protection Class	IP 20	IP 20	IP 20	IP 20	IP 20
Housing	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium
MRP (₹)	650	700	800	850	1200
Std. Pkg.	20	20	20	20	20

Rated Wattage	Length (A)	Width (B)	Height (C)
20W	555	24	37
24W	1185	24	37
28W	1185	24	37
40W	1185	24	37
48W	1185	32	41

All dimensions are in mm

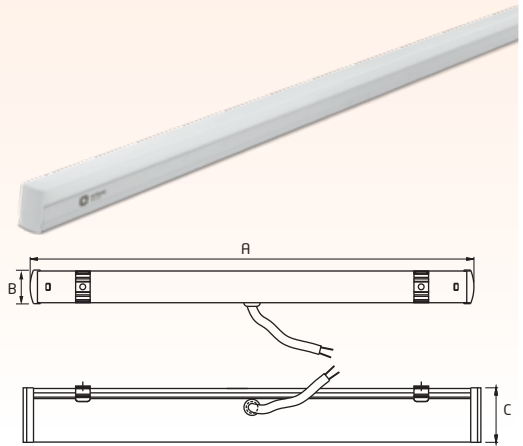

APPLICATIONS



Home



Offices



Shops



Restaurants


LED BATTEN

● 3 IN1 (GRACE MOODLIGHT)

MoodLight LED Batten is designed to provide light in 3 different colour options - Cool White (6500K), Neutral White (4000K), and Warm White (3000K) in the same batten. You can change the light colour as per your mood with the help of ON-OFF switch.

Details	LED Batten - 3 in 1 (Grace Moodlight)
Rated Wattage	20W
Lumen	2000
Power Factor	>0.90
Colour Temperature	3 in 1 (6500K, 4000K, 3000K)
CRI	>80
Protection Class	IP 20
Housing	Polycarbonate
Shape	Square
MRP (₹)	650
Std. Pkg.	20

Rated Wattage	Length (A)	Width (B)	Height (C)
20W	1135	24	37
All dimensions are in mm			

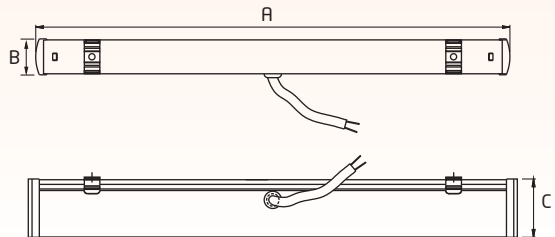

APPLICATIONS



Home



Offices



Shops



Restaurants


LED BATTEN MOTION SENSOR

Motion Sensor LED Batten switches ON by sensing the movement of a human being within a range of 15 feet and switches OFF automatically within 17 sec. when no movement is detected within 15 feet, thus saving electricity.

Details	Led Batten - Motion Sensor
Rated Wattage	20W
Lumen	2000
Power Factor	>0.90
Colour Temperature	6500K
Protection Class	IP 20
Housing	Polycarbonate
CRI	>80
MRP (₹)	1000
Std. Pkg.	20

Rated Wattage	Length (A)	Width (B)	Height (C)
20W	1135	28	37

All dimensions are in mm

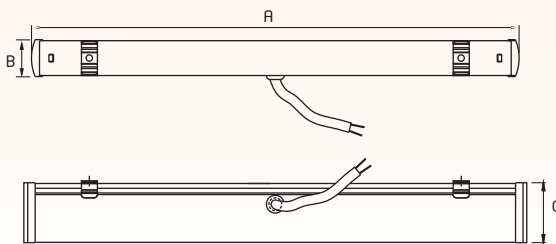

SENSOR ENABLED



AUTO ON/OFF



Stays OFF when no movement detected



Auto ON when it senses any movement within 15ft range



Auto OFF if no movement is detected after 17 sec.

APPLICATIONS



Staircase



Balconies



Store Room



Parking Area



Bathroom


LED TUBE

ORILINA

LED tube offers modern lighting solutions as per your need and it's 60% more energy efficient than traditional fluorescent tube light, it is a retrofit solution for old conventional tube with single side connection.

Details	Led Tube - Orilina
Rated Wattage	20W
Lumen	2000
Power Factor	>0.90
Colour Temperature	6500K
CRI	>80
Protection Class	IP 20
Housing	Polycarbonate
Shape	Round
MRP (₹)	800
Std. Pkg.	20

Rated Wattage	Length (A)	Width (B)
20W	1212	29
All dimensions are in mm		

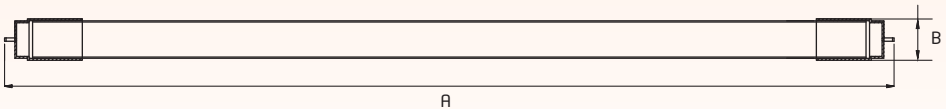

APPLICATIONS



Home



Shop



School



Colleges



LED RECESS PANEL RANGE

LED RECESS PANEL

● EDGELIT-METAL ●

LED Recess Panel - Metal comes with edge lit technology for glare-free uniform light distribution and is 60% more energy efficient than traditional downlights, it comes with aluminium housing for better heat management during long burning hours.

Details	LED Recess Panel - Metal				
Rated Wattage	3W	6W	12W	18W	24W
Lumen	240	430	880	1600	2100
Power Factor	>0.90	>0.90	>0.90	>0.90	>0.90
Colour Temperature	3000K, 4000K, 6500K	3000K, 4000K, 6500K	3000K, 4000K, 6500K	3000K, 4000K, 6500K	3000K, 4000K, 6500K
Shape	Square/Round	Square/Round	Square/Round	Square/Round	Square
Cut-out size (mm)	Square-70x70 Round-Ø70	Square-110x110 Round-Ø110	Square-160x160 Round-Ø160	Square-205x205 Round-Ø205	270x270 Square
Housing	Aluminium Die Casting	Aluminium Die Casting	Aluminium Die Casting	Aluminium Die Casting	Aluminium Die Casting
MRP (₹)	400	700	900	1400	1800
Std. Pkg.	20	20	20	06	10

Square


Rated Wattage	Length (A)	Width (B)	Cut-Out (C)
3W	85x85	21	70x70
6W	120x120	21	110x110
12W	170x170	21	160x160
18W	225x225	21	205x205
24W	300x300	21	270x270

All dimensions are in mm

Round

Rated Wattage	Length (A)	Width (B)	Cut-Out (C)
3W	85	21	70
6W	120	21	110
12W	170	21	160
18W	225	21	205


All dimensions are in mm

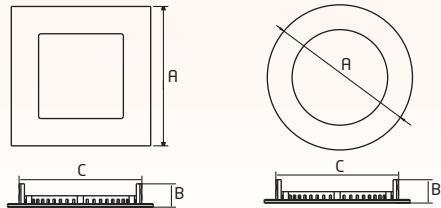

APPLICATIONS



Hotels




Offices




Shops



Hospitals



Restaurants



Shopping Complexes

LED RECESS PANEL

● EDGELIT-PC

LED Recess Panel - Polycarbonate housing comes with edge lit technology for glare-free uniform light distribution and is 60% more energy efficient than traditional downlights, it comes with sleek housing for better aesthetics. Fits easily in low height ceiling.

Details	LED Recess Panel - Polycarbonate				
Rated Wattage	3W	6W	12W	15W	18W
Lumen	225	450	1080	1200	1620
Power Factor	>0.90	>0.90	>0.90	>0.90	>0.90
Colour Temperature	3000K, 4000K, 6500K	3000K, 4000K, 6500K	3000K, 4000K, 6500K	3000K, 4000K, 6500K	3000K, 4000K, 6500K
Shape	Square/Round	Square/Round	Square/Round	Square/Round	Square/Round
Housing	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate
Cut-out size (mm)	Square-70x70 Round- Ø70	Square-110x110 Round- Ø110	Square-160x160 Round- Ø160	Square-160x160 Round- Ø160	Square-205x205 Round- Ø205
MRP (₹)	350	550	750	800	950
Std. Pkg.	20	20	20	20	10

Square


Rated Wattage	Length (A)	Width (B)	Cut-Out (C)
3W	80x80	24	70x70
6W	120x120	24	110x110
12W 15W	170x170	24	155x155
18W	220x220	24	205x205

All dimensions are in mm

Round

Rated Wattage	Length (A)	Width (B)	Cut-Out (C)
3W	80	24	70
6W	120	24	110
12W 15W	170	24	155
18W	220	24	205


All dimensions are in mm

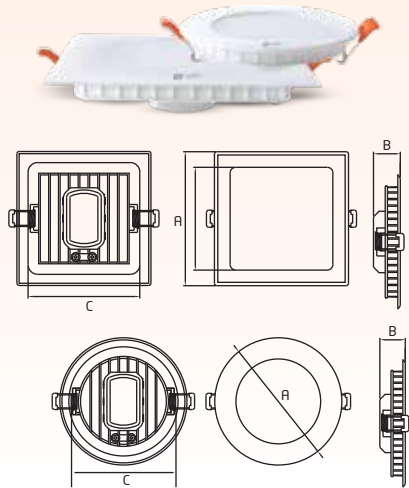

APPLICATIONS



Hotels



Offices



Shops



Hospitals



Restaurants



Shopping Complexes

LED RECESS PANEL

● BACKLIT-PC

These panels come with backlit LED technology that offers higher brightness and saves 80% more energy than traditional downlights.

Details	Recess Backlit Panel				
Rated Wattage	10W	12W	15W	20W	24W
Lumen	900	1200	1500	2000	2400
Power Factor	>0.90	>0.90	>0.90	>0.90	>0.90
Color Temperature	3000K, 4000K, 6000K	3000K, 4000K, 6000K	3000K, 4000K, 6000K	3000K, 4000K, 6000K	3000K, 4000K, 6000K
Shape	Square/Round	Square/Round	Square/Round	Square/Round	Square/Round
Cut-out size (mm)	Square-105X105 Round-Ø105mm	Square-130x130 Round-Ø130mm	Square-150x150 Round-Ø150mm	Square-205x205 Round-Ø205mm	Square-205x205 Round-Ø205mm
Housing	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate
MRP (₹)	700	750	800	1200	1500
Std. Pkg.	20	20	20	10	10

Square


Rated Wattage	Length (A)	Width (B)	Cut-Out (C)
10W	116x116	36	105x105
12W	144x144	36	130x130
15W	166x166	36	150x150
20W	220x220	36	205x205
24W	220x220	36	205x205

All dimensions are in mm


Round

Rated Wattage	Length (A)	Width (B)	Cut-Out (C)
10W	116	36	105
12W	144	36	130
15W	166	36	150
20W	220	36	205
24W	220	36	205

All dimensions are in mm

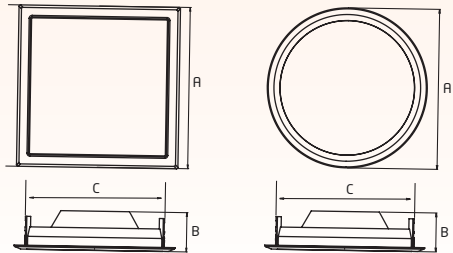

APPLICATIONS




LED RECESS PANEL

● 3 in 1 (MOODLIGHT)

MoodLight LED panel is designed to provide light in 3 different colour options - Cool White (6500K), Neutral White (4000K), and Warm White (3000K) in the same panel. You can change the light colour as per your mood with the help of ON-OFF switch.

Details	LED Recess Panel - 3 in 1 (Moodlight)	
Rated Wattage	10W	15W
Lumen	1000	1500
Power Factor	>0.90	>0.90
Colour Temperature	3 in 1 (6500K, 4000K, 3000K)	3 in 1 (6500K, 4000K, 3000K)
Shape	Square/Round	Square/Round
Cut-out size (mm)	Square - 105X105 Round - Ø105mm	Square - 150x150 Round - Ø150mm
Housing	Polycarbonate	Polycarbonate
MRP (₹)	1000	1200
Std. Pkg.	20	20



Square


Rated Wattage	Length (A)	Width (B)	Cut-Out (C)
10W	116x116	36	105x105
15W	166x166	36	150x150

All dimensions are in mm

Round

Rated Wattage	Length (A)	Width (B)	Cut-Out (C)
10W	116	36	105
15W	166	36	150

All dimensions are in mm

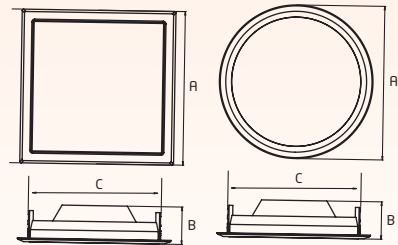

APPLICATIONS



LED RECESS PANEL


RAINBOW

Rainbow recess panel is available in 5 colour combinations (white + Blue, white + warm white, White + Pink, White + Green, White + PGB), you can change the colour as per your need by ON-OFF Switch.

Details	LED Recess Panel - Rainbow
Rated Wattage	6W
Lumen	450
Power Factor	>0.9
Colour Temperature	White + Blue, White + warm white, White + Pink, White + Green, White + PGB
Shape	Round/Square
Cut-out (mm)	120mm
Housing	Polycarbonate
MRP (₹)	650
Std. Pkg.	20

Rated Wattage	Length (A)	Width (B)	Cut-Out (C)
6W-Round	142	28	120
6W-Square	142x142	28	120x120

All dimensions are in mm

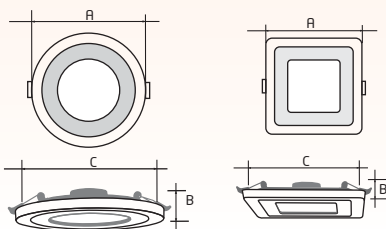

APPLICATIONS



Residences



Showrooms



Offices

LED RECESS PANEL

● BACKLIT TRIM

These backlit panel comes with slim housing design that easily fit into low ceiling height, offers higher brightness and saves 80% more energy efficient than traditional downlighters.

Details	Backlit Recess Panel Trim		
Rated Wattage	6W	12W	18W
Lumen	480lm	960lm	1440lm
Power Factor	>0.9	>0.9	>0.9
Colour Temperature	3000K/4000K/6500K	3000K/4000K/6500K	3000K/4000K/6500K
Shape	Round/square	Round/square	Round/square
Cut-out (mm)	Round-80, Square-80x80	Round-105, Square-105x105	Round-140, Square-140-x140
Housing	Polycarbonate	Polycarbonate	Polycarbonate
MRP (₹)	450	700	900
Std. Pkg.	20	20	20

Square


Rated Wattage	Length (A)	Width (B)	Cut-Out (C)
6W	96x96	27	80x80
12W	130x130	27	105x105
18W	160x160	27	140x140

All dimensions are in mm

Round

Rated Wattage	Length (A)	Width (B)	Cut-Out (C)
6W	96	27	80
12W	130	27	105
18W	160	27	140

All dimensions are in mm

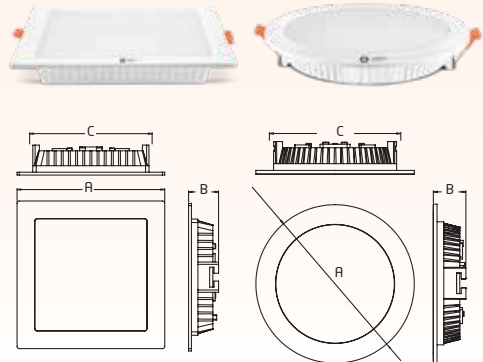

APPLICATIONS



Home



Offices



Showrooms



Colleges

LED RECESS PANEL

BACKLIT ADJUSTABLE

These backlit panel comes with adjustable cut-out size and rimless diffuser for even light distribution that offers higher brightness and saves 80% more energy efficient than traditional downlighters.

Details	Backlit Recess Adjustable Panel	
Rated Wattage	12W	18W
Lumen	1200lm	1800lm
Power Factor	>0.9	>0.9
Colour Temperature	3000K/4000K/6500K	3000K/4000K/6500K
Shape	Round/square	Round/square
Cut-out (mm)	Round-60-100mm Square-60-100mm	Round-60-140mm, Square-60-140mm
Housing	Polycarbonate	Polycarbonate
MRP (₹)	900	1100
Std. Pkg.	20	20



Square


Rated Wattage	Length (A)	Width (B)	Cut-Out (C)
12W	120	38	60-100
18W	170	38	60-140

All dimensions are in mm

Round

Rated Wattage	Length (A)	Width (B)	Cut-Out (C)
12W	120x120	38	60-100
18W	170x170	38	60-140

All dimensions are in mm

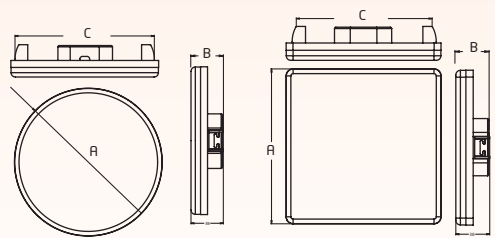

APPLICATIONS



LED RECESS PANEL

● VENUS GREEN


These panels comes with Backlit LED Technology with deep reflector that offers glare free high brightness light with external driver arrangement.

Details	Led Recess Panel - Venus Green	
Rated Wattage	10W	15W
Lumen (AC)	1000	1500
Power Factor	>0.9	>0.9
Colour Temperature	6500K/3000K/4000K	6500K/3000K/4000K
Shape	Round	Round
Cut-out (mm)	110	145
Housing	Polycarbonate	Polycarbonate
MRP (₹)	1000	1200
Std. Pkg.	20	20



Rated Wattage	Length (A)	Width (B)	Cut-Out (C)
10W	118	56	110
15W	152	61	145

All dimensions are in mm



APPLICATIONS



Home



Offices



Showrooms



Colleges

LED RECESS PANEL

● RAZOR

LED Recess panel Razor comes with edge lit technology for glare-free light distribution and is 60% more energy efficient than traditional downlighter, it comes with sleek housing and external driver arrangement that is easy to fix in low height ceiling.

Details	Led Recess Panel - Razor			
Rated wattage	6W	12W	15W	18W
Lumen (AC)	480	960	1350	1620
Power Factor	>0.9	>0.9	>0.9	>0.9
Colour Temperature	6500K/3000K/4000K	6500K/3000K/4000K	6500K/3000K/4000K	6500K/3000K/4000K
Shape	Round/Square	Round/Square	Round/Square	Round/Square
Cut-out size(mm)	100	125	150	200
Housing	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate
MRP (₹)	550	750	800	950
Std. Pkg.	20	20	20	10

Square



Rated Wattage	Length (A)	Width (B)	Cut-Out (C)
6W	118x118	22	100x100
12W	142x142	22	125x125
15W	167x167	22	150x150
18W	216x216	22	200x200

All dimensions are in mm

Round

Rated Wattage	Length (A)	Width (B)	Cut-Out (C)
6W	118mm	22mm	100mm
12W	142mm	22mm	125mm
15W	167mm	22mm	150mm
18W	216mm	22mm	200mm

All dimensions are in mm

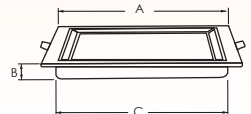

APPLICATIONS



Home




Offices



Showrooms



Colleges

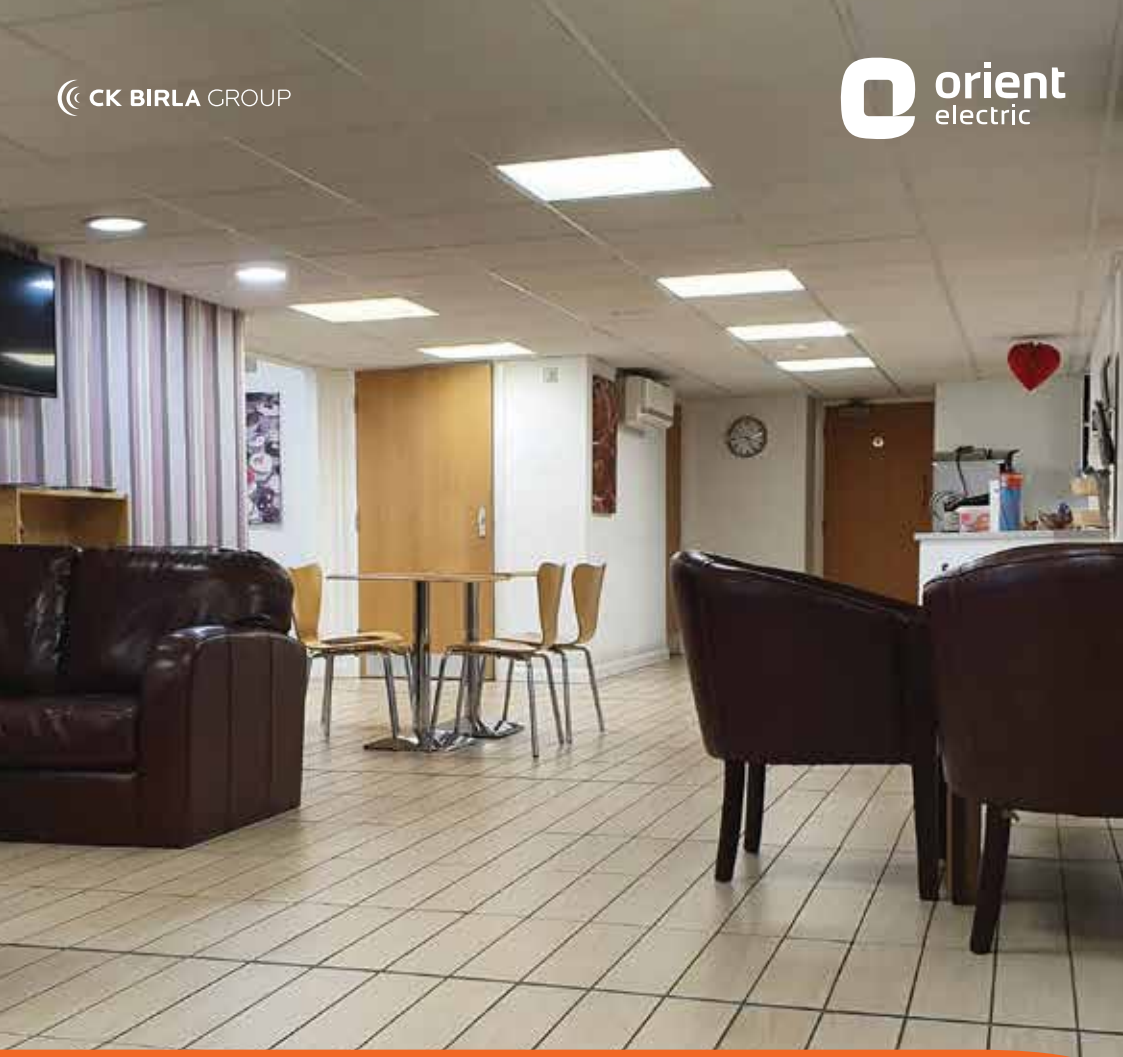

LED SURFACE PANEL RANGE

LED SURFACE PANEL


FULL SCREEN

Full Screen surface Panel comes with rimless diffusor that offers better light distribution. Besides, these panels are highly durable, offers better heat dissipation and are easy to install.

Details	Eternal Full Screen Surface Panel			
Rated Wattage	6W	12W	18W	24W
Lumen	510	990	1480	1980
Shape	Square/Round	Square/Round	Square/Round	Square/Round
Power Factor	>0.90	>0.90	>0.90	>0.90
Colour Temperature	3000K, 6000K	3000K, 6000K	3000K, 6000K	3000K, 6000K
Housing	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate
MRP (₹)	800	1000	1400	1800
Std. Pkg.	20	20	20	10

Rated Wattage	Length (A)	Width (B)
6W	91	27
12W	131	27
18W	156	27
24W	190	27

All dimensions are in mm

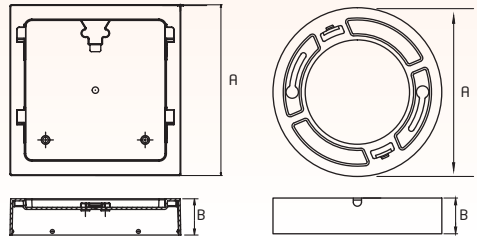

APPLICATIONS



Home



Offices



Shops



Malls


LED SURFACE PANEL ● STRIKER

Light up your compact spaces like modular kitchen, wardrobes, showcases etc. with this slim and easy to install LED panel.

Details	LED Striker	LED Striker
Rated Wattage	3W	6W
Lumen	200	400
Shape	Round	Round
Power Factor	>0.90	>0.90
Colour Temperature	6500K, 3000K, Red, Blue, Green, Pink	6500K, 3000K, Red, Blue, Green, Pink
Housing	Polycarbonate	Polycarbonate
MRP (₹)	200	400
Std. Pkg.	50	50

Rated Wattage	Length (A)	Mounting Hole (B)	Height (C)
3W	60	45	16
6W	90	75	16

All dimensions are in mm

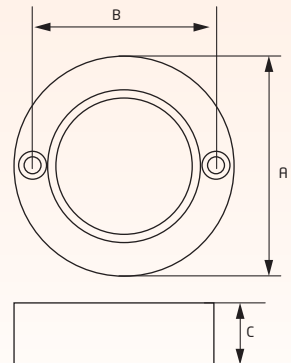

APPLICATIONS



Home Decor



Modular Kitchen



Showcases



Wardrobes



Cabinet Lighting



LED DOWNLIGHTER RANGE

LED DOWNLIGHTER


MOON LITE

Moon lite gives elegant look to your home office. Perfect solution to fix in 3 inches junction box.

Details	LED Downlighter - Moon Lite		
Rated Wattage	5W	7W	9W
Lumen	450	590	765
Shape	Round	Round	Round
Cut-out size (mm)	Ø75mm	Ø75mm	Ø75mm
Power Factor	>0.90	>0.90	>0.90
Colour Temperature	6500K, 3000K, Red, Blue, Green & Pink	6500K, 3000K, Red, Blue, Green & Pink	6500K, 3000K, Red, Blue, Green & Pink
Housing	Polycarbonate	Polycarbonate	Polycarbonate
MRP (₹)	400	425	450
Std. Pkg.	20	20	20



Rated Wattage	Length (A)	Width (B)	Cut-Out (C)
5W, 7W, 9W	112	50	75
All dimensions are in mm			

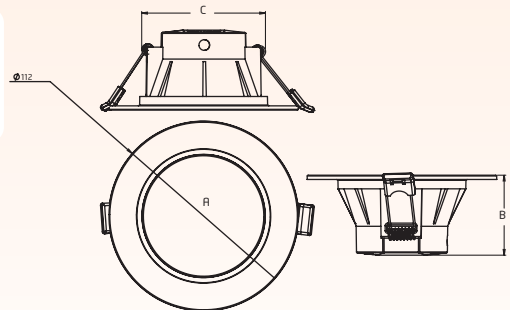

APPLICATIONS



Residences



Showrooms



Mall



Offices



Educational
Institutes



LED DOWNLIGHTER

● MOON LITE 5W (MINI)

Moon lite mini gives elegant look to your home office. Perfect solution to fix in 3 inches junction box with its compact height design that is easy to fix in low height ceiling.

Details	Moon Lite Mini LED Downlighter
Rated Wattage	5W
Lumen	450
Shape	Round
Power Factor	>0.90
Cut Out Size	Ø75mm
Colour Temperature	6500K/ 3000K/ 4000K/ RED/ BLUE/ PINK/ GREEN
Housing	Polycarbonate
MRP (₹)	350
Std Pkg.	50

Rated Wattage	Length (A)	Width (B)	Cut-Out (C)
5W	108	26	75
All dimensions are in mm			

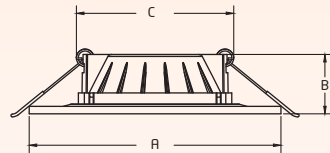

APPLICATIONS



Residences



Showrooms



Mall



Offices



Educational
Institutes

LED DOWNLIGHTER


MOON LITE 3W (MINI)

Moon lite mini gives elegant look to your home office. Perfect solution to fix in 2 inches junction box.

Details	LED Downlighter - Multicolour (Mini)
Rated Wattage	3W
Shape	Round
Cut-out size (mm)	48mm
Power Factor	>0.90
Colour Temperature	3 in 1 Red, Blue & Pink
Housing	Polycarbonate
MRP (₹)	400
Std. Pkg.	20

Rated Wattage	Length (A)	Height (B)	Cut-Out (C)
3W	81	35	48

All dimensions are in mm

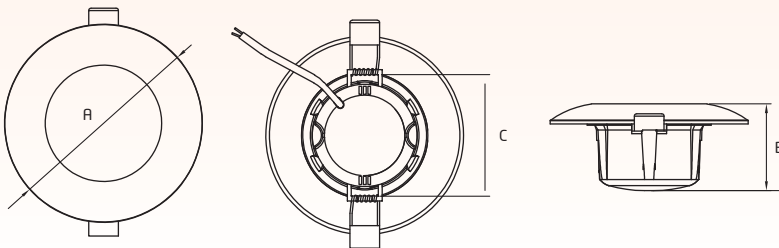

APPLICATIONS



Residences



Showrooms



Mall



Offices



Educational
Institutes

LED DOWNLIGHTER

MOODLIGHT 5W

Mood Light LED downlighter is designed to provide light in 3 different colour options - Cool White (6500K), Neutral White (4000K), and Warm White (3000K) in the same downlighter. You can change the light colour as per your mood with the help of ON-OFF switch

Details	LED Downlighter - Moodlight
Rated Wattage	5W
Lumen	450
Shape	Round
Power Factor	>0.90
Cut-out Size	Ø75mm
Colour Temperature	3 in 1 (6500K/3000K/4000K)
MRP (₹)	500
Std. Pkg.	20

Rated Wattage	Length (A)	Height (B)	Cut-Out (C)
5W	112	50	75


All dimensions are in mm



Neutral White



Warm White

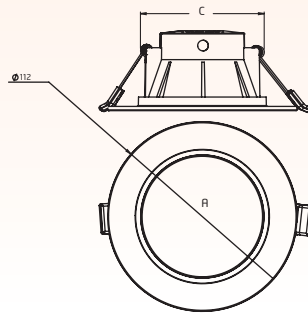

APPLICATIONS



Residences



Showrooms



Offices

LED DOWNLIGHTER

MULTICOLOUR 5W

Multicolour LED downlighter is designed to provide light in 3 different colour options -RED , BLUE , PINK in the same downlighter. You can change the colour as per your mood with the help of ON-OFF switch.

Details	LED Downlighter - Multicolour
Rated Wattage	5W
Shape	Round
Power Factor	>0.75
Cut-out Size	Ø75mm
Colour Temperature	3 in 1 (Red, Blue & Pink)
MRP (₹)	500
Std. Pkg.	20



Rated Wattage	Length (A)	Height (B)	Cut-Out (C)
5W	112	50	75
All dimensions are in mm			




Blue



Pink



Red

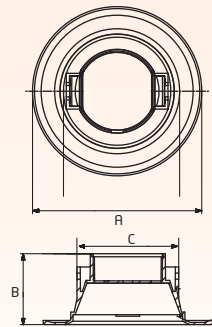

APPLICATIONS



Residences



Showrooms



Offices

LED DOWNLIGHTER


MOODLIGHT MINI-3W

Mood Light LED Downlighter is designed to Provide light in 3 different colour options - Cool white (6500K), neutral White (4000K), and warm White (3000K) in the same downlighter. You can change the light colour as per your mood with the help of ON-OFF switch.

Details	LED Downlighter - Moodlight (Mini)
Rated Wattage	3W
Lumen	180
Shape	Round
Cut-out size (mm)	48mm
Power Factor	>0.90
Colour Temperature	3 in 1 6500K, 4000K, 3000K
Housing	Polycarbonate
MRP (₹)	400
Std. Pkg.	20

Rated Wattage	Length (A)	Height (B)	Cut-Out (C)
3W	81	45	48

All dimensions are in mm

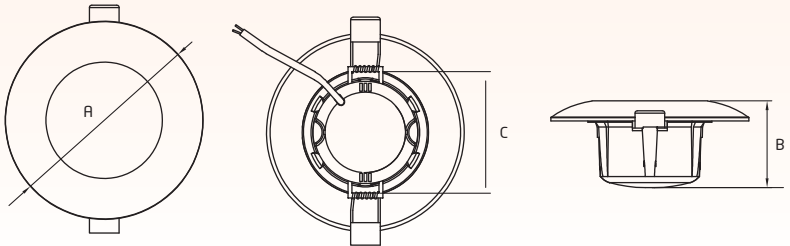

APPLICATIONS



Residences



Showrooms



Offices

LED DOWNLIGHTER


MULTICOLOUR MINI-3W

Mood Light LED Downlighter is designed to Provide light in 3 different colour options - Red, Blue, Pink in the same downlighter. You can change the light colour as per your mood with the help of ON-OFF switch.

Details	LED Downlighter - Multicolour (Mini)
Rated Wattage	3W
Shape	Round
Cut-out size (mm)	48mm
Power Factor	>0.90
Colour Temperature	3 in 1 Red, Blue & Pink
Housing	Polycarbonate
MRP (₹)	400
Std. Pkg.	20

Rated Wattage	Length (A)	Height (B)	Cut-Out (C)
3W	81	45	48

All dimensions are in mm

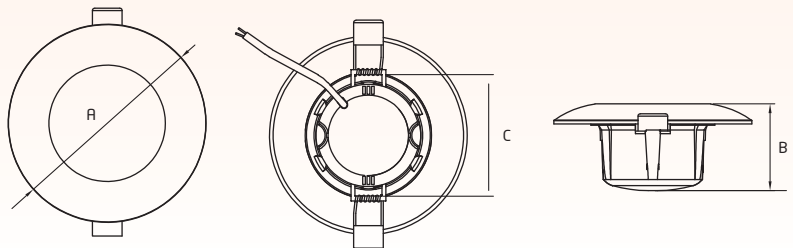

APPLICATIONS



Residences



Showrooms



Offices

LED DOWNLIGHTER


● MOON LITE DEEP

LED Deep downlighter comes with rimless diffusor that offers better light distribution and easy to install in deep junction box with same cut-out for different wattage options.

Details	LED Downlighter - Moon Lite Deep			
Rated Wattage	6W	9W	12W	15W
Lumen	600	900	1200	1500
Shape	Round	Round	Round	Round
Cut-out size (mm)	Ø48mm	Ø48mm	Ø48mm	Ø48mm
Power Factor	>0.90	>0.90	>0.90	>0.90
Colour Temperature	6500K, 3000K, Red, Blue, Green & Pink	6500K, 3000K, Red, Blue, Green & Pink	6500K, 3000K, Red, Blue, Green & Pink	6500K, 3000K, Red, Blue, Green & Pink
Housing	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate
MRP (₹)	450	550	650	750
Std. Pkg.	20	20	20	20

Rated Wattage	Length (A)	Width (B)	Cut-Out (C)
6W 9W	82	64	48
12W 15W	141	48	

All dimensions are in mm



APPLICATIONS



Residences



Showrooms



Mall



Educational
Institutes

LED DOWNLIGHTER

RAINBOW RECESS


Rainbow Recess LED Downlighter is available in 4 colour combinations (White Blue, White Warm White, White Pink, White Green), you can change the colour combination with outer ring as per your need by ON-OFF Switch.

Details	LED Recess Downlighter - Rainbow	
Rated Wattage	6W	12W
Lumen	600	1200
Shape	Round	Round
Power Factor	>0.90	>0.90
Cut-out Dia.	Ø48mm	Ø48mm
Colour Temperature	6500K+Blue, 6500K+WW, 6500K+Pink, 6500K+Green	6500K+Blue, 6500K+WW, 6500K+Pink, 6500K+Green
MRP (₹)	600	1100
Std. Pkg.	20	20



Rated Wattage	Length (A)	Width (B)	Cut-Out (C)
6W	88	42	48
12W	118	42	48

All dimensions are in mm



Pink



Red



Green

APPLICATIONS



Residences



Showrooms



Mall



Offices



Educational Institutes

LED DOWNLIGHTER

RAINBOW SURFACE



Rainbow Surface LED Downlighter is available in 4 colour combinations (White Blue, White Warm White, White Pink, White Green), you can change the colour combination with outer ring as per your need by ON-OFF Switch.

Details	LED Surface Downlighter - Rainbow
Rated Wattage	6W
Lumen	600
Shape	Round
Power Factor	>0.90
Colour Temperature	6500K+Blue, 6500K+Ww, 6500K+Pink, 6500K+Green
MRP (₹)	650
Std. Pkg.	20



Rated Wattage	Length (A)	Width (B)	Cut-Out (C)
6W	86	44	48
12W	140	44	48

All dimensions are in mm



APPLICATIONS



Residences



Showrooms



Mall



Offices



Educational
Institutes


MOON LITE DÉCOR ● DOWNLIGHTER-5W

Enhance your interior with décor range of moon lite downlighter, comes in wooden finish 3-D printing housing, which can match your ceiling light with your interior.

Details	Moon Lite Décor Downlighter
Rated Wattage	5W
Lumen	450
Shape	Round
Power Factor	>0.90
Cut Out Size	Ø75mm
Colour Temperature	6500K, 3000K, 4000K
MRP (₹)	500
Std. Pkg.	20

Rated Wattage	Length (A)	Height (B)	Cut-Out (C)
5W	112	50	75

All dimensions are in mm

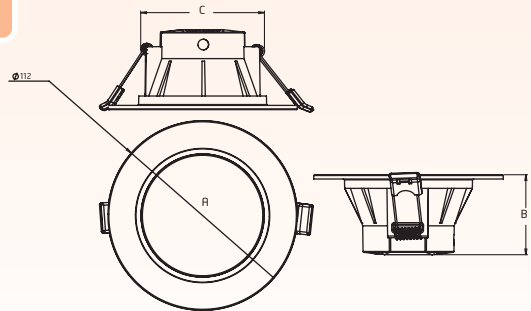

APPLICATIONS



Residences



Showrooms



Mall



Offices



Educational Institutes

LED DOWNLIGHTER

MOON LITE RECESS METAL


Moon Lite Metal downlighter gives elegant look to your home office, perfect solution to fix in 3 inches junction box.

Details	Moon Lite Recess Downlighter	
Rated Wattage	6W	12W
Lumen	480	1020
Shape	Round	Round
Power Factor	>0.90	>0.90
Cut Out Size	Ø62mm	Ø62mm
Colour Temperature	6500K, 3000K, 4000K, Red, Blue, Pink, Green	6500K, 3000K, 4000K, Red, Blue, Pink, Green
MRP (₹)	500	1000
Std. Pkg.	40	20



Rated Wattage	Length (A)	Width (B)	Cut-Out (C)
6W	105	45	62
12W	110	45	62

All dimensions are in mm

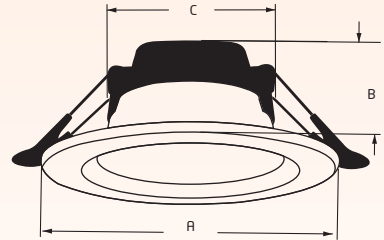

APPLICATIONS



Residences



Showrooms



Mall



Offices



Educational
Institutes


LED DOWNLIGHTER

MOODLIGHT RECESS METAL

Mood Light LED downlighter is designed to provide light in 3 different colour options - Cool White (6500K), Neutral White (4000K), and Warm White (3000K) in the same downlighter. You can change the light colour as per your mood with the help of ON-OFF switch, it also have prismatic ring which gives elegant look during light-up.

Details	Moodlight Recess Downlighter-3CCT
Rated Wattage	6W
Lumen	480
Shape	Round
Power Factor	>0.9
Cut-out Size	62mm
Colour Temperature	3in1 (6500K, 4000K, 3000K)
MRP (₹)	550
Std. Pkg.	40

Rated Wattage	Length (A)	Width (B)	Cut-Out (C)
6W	105	45	62
All dimensions are in mm			

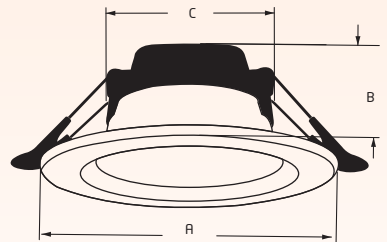

APPLICATIONS



Residences



Showrooms



Offices


LED DOWNLIGHTER

MULTICOLOUR RECESS METAL

Multicolour LED downlighter is designed to provide light in 3 different colour options -RED , BLUE , PINK in the same downlighter. You can change the colour as per your mood with the help of ON-OFF switch, it also have prismatic ring which gives elegant look during light-up.

Details	Multicolour Recess Downlighter
Rated Wattage	6W
Shape	Round
Power Factor	>0.9
Cut-out Size	62mm
Colour Temperature	3in1 (Red, Blue, Pink)
MRP (₹)	550
Std. Pkg.	40

Rated Wattage	Length (A)	Width (B)	Cut-Out (C)
6W	105	45	62
All dimensions are in mm			

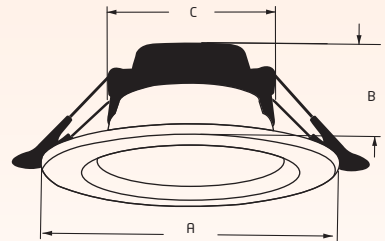

APPLICATIONS



Residences



Showrooms



Offices



LED SPOT LIGHT



LED SPOT LIGHT

● VIVID (1W)

LED Spotlights are designed to highlight special corners of your homes and offices to make it more lively. These lights are your perfect modern lighting options.

Details	LED Spotlight - Vivid
Rated Wattage	1W
Lumen	50
Shape	Round
Cut-out size (mm)	Ø30mm
Power Factor	>0.90
Colour Temperature	6500K, 3000K, Red, Blue, Green, Pink
CRI	>80
Protection Class	IP 20
Housing	Polycarbonate
MRP (₹)	125
Std. Pkg.	100

Rated Wattage	Dia (A)	Height (B)	Cut-Out (C)
1W	38	22	30
All dimensions are in mm			

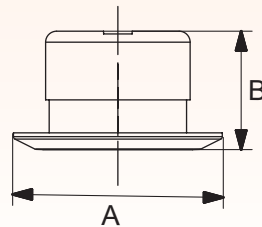

APPLICATIONS



Showrooms



Malls



Shelf Lighting



Residences




LED SPOT LIGHT

VIVID (2W)

LED Spotlights are designed to highlight special corners of your homes and offices to make it more lively. These lights are your perfect modern lighting options.

Details	LED Spotlight - Vivid
Rated Wattage	2W
Lumen	100
Shape	Round
Cut-out size (mm)	Ø32mm
Power Factor	>0.90
Colour Temperature	3000K, 6500K, Red, Blue, Green & Pink
CRI	>80
Protection Class	IP 20
Housing	Polycarbonate
MRP (₹)	200
Std. Pkg.	100

Rated Wattage	Dia (A)	Height (B)	Cut-Out (C)
2W	42	14	32
All dimensions are in mm			



APPLICATIONS



Showrooms



Malls



Shelf Lighting



Residences



LED SPOT LIGHT

VIVID (3W)

LED Spotlights are designed to highlight special corners of your homes and offices to make it more lively. These lights are your perfect modern lighting options, it can be fixed in 2 inches junction box.

Details	LED Spot Light - Vivid
Rated Wattage	3W
Lumen	180
Power Factor	>0.90
Cut-out Size	Ø50mm
Colour Temperature	3000K/6500K Red, Blue, Pink & Green
CRI	>80
Protection Class	IP 20
Housing	Polycarbonate
MRP (₹)	200
Std. Pkg.	50

Rated Wattage	Length (A)	Height (B)	Cut-Out (C)
3W	75	27	50
All dimensions are in mm			



APPLICATIONS




FLEXI SPOT LIGHT

● 3W

LED Flexi Spot light come with 360° rotation and focused beam angle of 20°. It can be used as picture light & bed side reading light

Details	Flexi Spot Light - 3W
Rated Wattage	3W
Lumen (AC)	210
Shape	Round
Power Factor	>0.5
Colour Temperature	6500K/3000K/4000K
CRI	>80
Protection Class	IP 20
Housing	Aluminium
MRP (₹)	1000
Std. Pkg.	20

Rated Wattage	Length (A)	Height (B)
3W	65	210
All dimensions are in mm		



APPLICATIONS



Home



Offices



Shops



Restaurants


LED COB SPOT LIGHT

LED COB spot light has a unique narrow beam-angle light distribution, slim design that makes it perfect to fix in small high ceiling. It comes with polycarbonate housing for better aesthetics.

Details	LED COB Spot Light			
Rated Wattage	3W	6W	9W	12W
Lumen	240	510	765	1020
Shape	Round	Round	Round	Round
Cut-out size (mm)	Ø52mm	Ø68mm	Ø90mm	Ø115mm
Power Factor	>0.90	>0.90	>0.90	>0.90
Colour Temperature	6500K, 4000K, 3000K	6500K, 4000K, 3000K	6500K, 4000K, 3000K	6500K, 4000K, 3000K
Housing	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate
Beam Angle	40°	40°	40°	40°
Swivel Arrangement	50°	50°	50°	50°
MRP (₹)	450	600	750	1000
Std. Pkg.	20	20	20	20

Rated Wattage	Length (A)	Width (B)	Height (C)
3W	75	43	52
6W	95	46	68
9W	117	55	90
12W	140	55	115

All dimensions are in mm

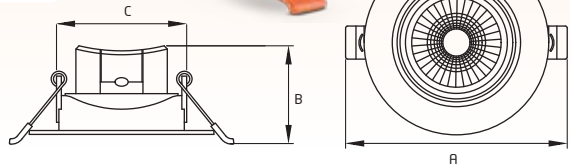

APPLICATIONS



Jewellers



Showrooms



Shelf Lighting



Art Galleries



Corporate Offices

LED COB DOWNLIGHTER


● COB DEEP

LED COB Downlighter has a unique narrow beam-angle light distribution, slim design that makes it perfect to fix in small height ceiling. It comes with aluminium housing for better heat management during long burning hours.

Details	LED COB Downlighter - Deep					
Rated Wattage	3W	6W	9W	15W	18W	24W
Lumen	210	511	750	1200	1500	1920
Shape	Round	Round	Round	Round	Round	Round
Cut-out size	Ø55mm	Ø68mm	Ø68mm	Ø89mm	Ø111mm	Ø111mm
Power factor	>0.9	>0.9	>0.9	>0.9	>0.9	>0.9
Colour Temperature	6500K/4000K 3000K	6500K/4000K 3000K	6500K/4000K 3000K	6500K/4000K 3000K	6500K/4000K 3000K	6500K/4000K 3000K
Housing	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium
Beam Angle	30°	30°	30°	30°	30°	30°
Suivel Arrangement	Upto 60°	Upto 60°	Upto 60°	Upto 60°	Upto 60°	Upto 60°
MRP (₹)	600	800	1000	1500	1800	2500
Std. Pkg.	20	20	20	20	10	10

Rated Wattage	Dia (A)	Height (B)	Cut-Out (C)
3W	67	53.5	55
6W	85.5	60	68
9W	85.5	85	68
15W	107.5	95.5	89
18W	137.5	87	111
24W	137.5	116.5	111

All dimensions are in mm

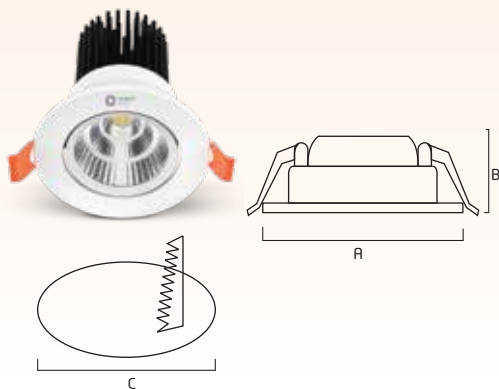

APPLICATIONS



Jewellers



Showrooms



Shelf Lighting



Art Galleries



Corporate Offices



LED COB DOWNLIGHTER

MINI

LED COB downlighter mini has a narrow beam angle light distribution, slim design that makes it perfect to fix in small height ceiling. It comes with plastic housing for better aesthetics.

Details	COB LED Downlighter Mini
Rated Wattage	3W
Lumen	195
Power Factor	>0.5
Colour Temperature	6500K/ 3000K/ 4000K/ RED/ BLUE/ PINK/ GREEN
Shape	Round
Cut-out (mm)	55mm
Housing	Polycarbonate
Beam Angle	40°
Swivel Arrangement	60°
MRP (₹)	450
Std Pkg.	50

Rated Wattage	Length (A)	Width (B)	Cut-Out (C)
3W	75	39	55
All dimensions are in mm			

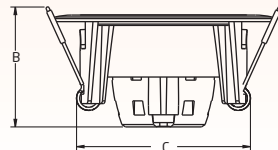

APPLICATIONS





LED COB DOWNLIGHTER

● MINI-3CCT

LED COB downlighter mini is designed to provide light in 3 different colour options - Cool white (6500K), neutral White (4000K), and warm White (3000K) in the same downlighter. You can change the light colour as per your mood with the help of ON-OFF switch.

Details	COB LED Downlighter Mini -3cct
Rated Wattage	3W
Lumen	180
Power Factor	>0.5
Colour Temperature	3in1 (6500K, 3000K, 4000K)
Shape	Round
Cut-out (mm)	55mm
Housing	Polycarbonate
Beam Angle	40°
Swivel Arrangement	60°
MRP (₹)	500
Std. Pkg.	50

Rated Wattage	Length (A)	Width (B)	Cut-Out (C)
3W	75	39	55
All dimensions are in mm			

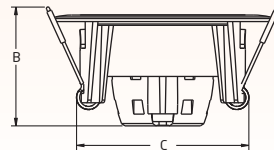

APPLICATIONS



Showrooms



Malls



Shelf Lighting



Residences

LED COB DOWNLIGHTER

● PRISM-RECESS


Prism COB Recess downlighter comes with gold finish reflector to enhance your interior and has narrow beam angle 40°.

Details	Prism Recess COB Downlighter	
Rated Wattage	6W	12W
Lumen	480lm	960lm
Power Factor	>0.9	>0.9
Colour Temperature	3000K, 4000K, 6500K	3000K, 4000K, 6500K
Shape	Round	Round
Cut-out (mm)	55mm	75mm
Housing	Aluminium Die casting	Aluminium Die casting
MRP (₹)	1500	2000
Std. Pkg.	20	20



Rated Wattage	Length (A)	Width (B)	Cut-Out (C)
6W	65	67	55
12W	85	82	75

All dimensions are in mm

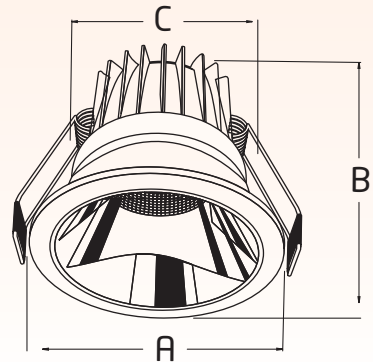

APPLICATIONS



Jewellers



Showrooms



Shelf Lighting



Art Galleries



Corporate Offices

LED COB DOWNLIGHTER

● PRISM-SURFACE


Prism COB Surface downlighter comes with gold finish reflector to enhance your interior and has narrow beam angle 40°.

Details	Prism Surface COB Downlighter	
Rated Wattage	6W	12W
Lumen	480lm	960lm
Power Factor	>0.9	>0.9
Colour Temperature	3000K/4000K/6500K	3000K/4000K/6500K
Shape	Round	Round/Square
Housing	Aluminium Die casting	Aluminium Die casting
MRP (₹)	1500	2000
Std. Pkg.	20	20



Rated Wattage	Length (A)	Width (B)
6W - Cylinder	80	55
12W - Cylinder	90	77
12W - Square	92	77

All dimensions are in mm



APPLICATIONS



Jewellers



Showrooms



Shelf Lighting



Art Galleries



Corporate Offices

LED COB TRACK LIGHT


LED COB Track light has a unique narrow beam-angle light distribution. It comes with aluminium housing for better heat management during long burning hours.

Details	LED COB Track Light		
Rated Wattage	15W	20W	30W
Lumen	1200	1500	2400
Shape	Round	Round	Round
Power Factor	>0.90	>0.90	>0.90
Colour Temperature	3000K, 6000K	3000K, 6000K	3000K, 6000K
Housing	Aluminium Die casting	Aluminium Die casting	Aluminium Die casting
Beam Angle	38°	38°	38°
MRP (₹)	1200	1800	2200
Std. Pkg.	20	20	20



Rated Wattage	Length (A)	Width (B)	Dia (C)	Height (D)
15W	158	103	73	128
20W	158	122	73	135
30W	182	143	87	168

All dimensions are in mm

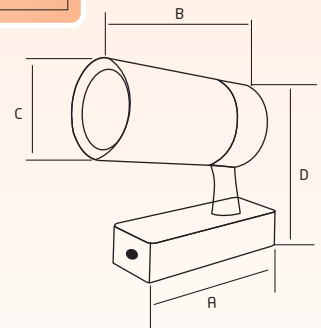

APPLICATIONS



Jewellers



Showrooms



Art Galleries


LED SURFACE TRACK LIGHT

LED Surface Track light has a unique narrow beam-angle (38°) light distribution. It comes with aluminium housing for better heat management during long burning hours.

Details	LED Surface Track Light				
Rated Wattage	7W	10W	15W	20W	30W
Lumen	600	800	1200	1600	2400
Shape	Round	Round	Round	Round	Round
Power Factor	>0.90	>0.90	>0.90	>0.90	>0.90
Colour Temperature	3000K, 4000K, 6000K	3000K, 4000K, 6000K	3000K, 4000K, 6000K	3000K, 4000K, 6000K	3000K, 4000K, 6000K
Housing	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium
Beam Angle	38°	38°	38°	38°	38°
MRP (₹)	1000	1050	1300	2000	2500
Std. Pkg.	20	20	20	20	20

Rated Wattage	Length (A)	Width (B)	Dia (C)	Height (D)
7W	100	65	46	95
10W	100	82	46	95
15W	140	82	73	135
20W	140	122	73	135
30W	167	143	87	157

All dimensions are in mm



APPLICATIONS



Jewellers



Showrooms



Art Galleries



OUTDOOR LIGHTING

LED STREET LIGHT



LED Street Light provides better lighting, saves up to 80% more energy than HPS MH streetlights and are perfect for parks, campuses etc.

Details	LED Street Light				
Rated Wattage	20W	24W	30W	40W	70W
Lumen	2200	2400	3300	4400	7700
Power Factor	>0.95	>0.95	>0.95	>0.95	>0.95
Colour Temperature	6500K	6500K	6500K	6500K	6500K
Protection Class	IP 65	IP 65	IP 65	IP 65	IP 65
MRP (₹)	2200	3000	3000	4500	5500
Std. Pkg.	8	8	8	8	4



Rated Wattage	Length (A)	Width (B)	Height (C)
20W 24W	246	103	85
30W 40W	255	118	85
70W	302	163	107

All dimensions are in mm

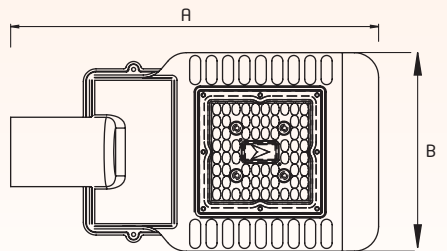

APPLICATIONS



Road



Parks



Parking Area


LED STREET LIGHT MODERNA

LED Street Light Moderna provides better lighting, saves up to 80% more energy than HPS MH streetlights and are perfect for parks, campuses etc.


Details	Led Street Light Moderna	
Rated Wattage	20W	30W
Lumen	2000	3000
Power Factor	>0.9	>0.9
Colour Temperature	6500K	6500K
Housing	Polycarbonate	Polycarbonate
Protection class	IP 66	IP 66
MRP (₹)	1500	2500
Std. Pkg.	10	10

Rated Wattage	Length (A)	Width (B)	Height (C)
20W	258	84	57
30W	310	100	57

All dimensions are in mm

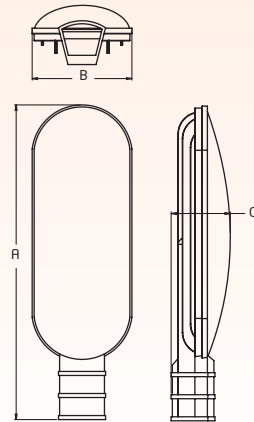

APPLICATIONS




LED FLOOD LIGHT TRIM

LED Flood light trim is perfect solution for area lighting such as stadiums, outdoor weddings, Façade lighting etc. LED Flood Lights is slimmer in design and gives premium aesthetics look.

Details	LED Flood Light - Trim		
Rated Wattage	30W	50W	100W
Lumen	3000	5000	10000
Power Factor	>0.9	>0.9	>0.9
Colour Temperature	6500K	6500K	6500K
Housing	Aluminium Die casting	Aluminium Die casting	Aluminium Die casting
Protection class	IP 66	IP 66	IP 66
MRP (₹)	2500	3500	5000
Std Pkg.	10	10	5

Rated Wattage	Length (A)	Width (B)	Height (C)
30W	195	156	43
50W	220	168	46
100W	295	220	52

All dimensions are in mm

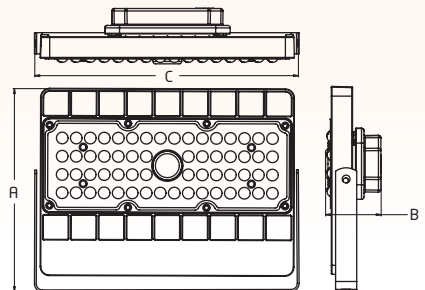

APPLICATIONS



Area Lighting



Sports Complex



Hoardings

LED FLOOD LIGHT


SLIM

LED Flood light is perfect solution for area lighting such as stadiums, outdoor weddings façade lighting etc. LED Flood Lights is slimmer in design and gives premium aesthetics look.

Details	LED Flood Light (10W - 50W)			
Rated Wattage	10W	20W	30W	50W
Lumen	1000	2000	3000	5000
Power Factor	>0.9	>0.9	>0.9	>0.9
Colour Temperature	3000K/6500K	3000K/6500K	3000K/6500K	3000K/6500K
Housing	Aluminium Die casting	Aluminium Die casting	Aluminium Die casting	Aluminium Die casting
Protection Class	IP 65	IP 65	IP 65	IP 65
MRP (₹)	1500	2500	3500	4500
Std. Pkg.	40	40	10	04

Rated Wattage	Length (A)	Width (B)	Height (C)
10W	115	90	29.5
20W	145	110	33.5
30W	185	135	36
50W	205	165	42

All dimensions are in mm

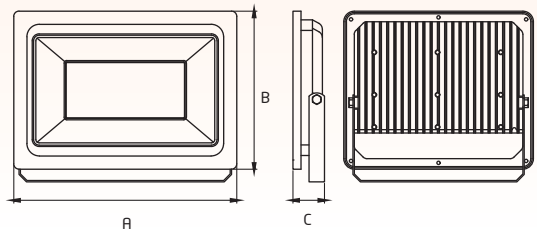

APPLICATIONS



Area Lighting



Sports Complex



Hoardings

LED FLOOD LIGHT


SLIM

LED Flood light is perfect solution for area lighting such as stadiums, outdoor weddings façade lighting etc. LED Flood Lights is slimmer in design and gives premium aesthetics look.

Details	LED Flood Light (70W - 200W)			
Rated Wattage	70W	100W	150W	200W
Lumen	7000	10000	13500	18000
Power Factor	>0.9	>0.9	>0.9	>0.9
Colour Temperature	3000K, 6500K	3000K, 6500K	3000K, 6500K	3000K, 6500K
Housing	Aluminium Die casting	Aluminium Die casting	Aluminium Die casting	Aluminium Die casting
Protection Class	IP 65	IP 65	IP 65	IP 65
MRP (₹)	5500	7000	10000	14000
Std. Pkg.	10	04	05	04

Rated Wattage	Length (A)	Width (B)	Height (C)
70W	229	165	40
100W	285	220	48
150W	340	250	55
200W	400	300	55

All dimensions are in mm

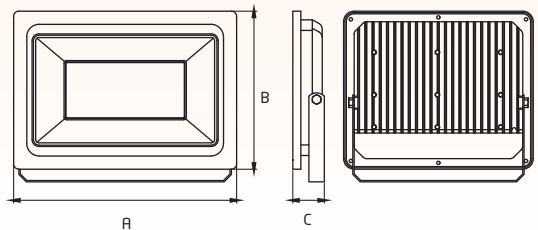

APPLICATIONS



Area Lighting



Sports Complex



Hoardings

LED BULKHEAD


LED Bulkhead is easy to install indoor as well as outdoor and gives your home and office space a lively look. It comes with IP65 protection.

Details	LED Bulkhead	
Rated Wattage	5W	12W
Lumen	450	1080
Power Factor	>0.90	>0.90
Coloru Temperature	6500K/3000K	6500K/3000K
Housing	Polycarbonate	Polycarbonate
IP Class	IP 65	IP 65
MRP (₹)	350	700
Std. Pkg.	50	50



Rated Wattage	Length (A)	Width (B)	Height (C)
5W	117	44	61
12W	165	85	65

All dimensions are in mm

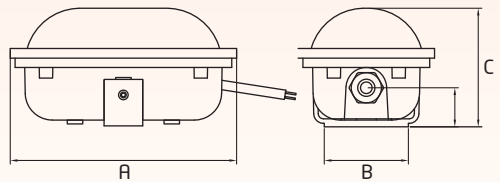

APPLICATIONS



Area Lighting



Sports Complex



Hoardings



FESTIVE LIGHTS

LED STRIP LIGHT

LED Strip Lights offer a variety of lighting colours and effects to decorate your home. Thus, making them suitable for the Cove lighting.

Details	Strip Light		
Rated Wattage	24W	48W	60W
Lumen	2500	3500	5500
Protection Class	IP 20	IP 20	IP 20
Colour Temperature	6500K, 3000K Red/Blue/Green/Pink	6500K, 3000K	6500K, 3000K, 4000K Red/Blue/Green/Pink
Length	5 meters	5 meters	5 meters
MRP (₹)	800	1000	2500
Std. Pkg.	50	50	50



APPLICATIONS



Cove Lighting



Decorative Lighting



Showrooms



Mall

LED FESTIVAL STRING LIGHT

LADI

LED Ladi offers a variety of lighting colours for home decoration during festival and special occasions.

Details	Joylite Pixel	Joylite Diamond	Joylite Crystal
Rated Wattage	3W	3W	3W
LED Diameter	5mm	5mm	5mm
Protection Class	IP 20	IP 20	IP 20
Colour Temperature	White/Warm White/Red/ Blue/Green/Pink/Multicolour	RG-RB	Warm White/ Multicolour
Length	10meters	10meters	3.5meters
MRP (₹)	400	400	350
Std. Pkg.	50	50	50



MADE IN INDIA



APPLICATIONS



Festival Lighting



Wedding & Birthday Decoration



Showrooms



Mall

LED TORAN LIGHT

Radiant LED Toran Lights that transform any space and comes with IP20 protection.

Details	Joylite Golden Toran
Rated Wattage	3W
Protection Class	IP20
Colour Temperature	Warm White
Length	10meter
MRP (₹)	450
Std. Pkg.	50



APPLICATIONS



Festival Lighting



Wedding & Birthday Decoration



Showrooms



Mall

LED CURTAIN LIGHT

Add allure to any setting with LED Curtain Lights that comes with IP20 protection.

Details	Joylite Diya	Joylite Star	Joylite Mannat Ball
Rated Wattage	5W	5W	5W
Protection Class	IP20	IP20	IP20
Colour Temperature	Warm White	Warm White	Warm White/Multicolour
Length	12feet	12feet	12feet
MRP (₹)	800	800	950
Std. Pkg.	30	30	24



APPLICATIONS



Festival Lighting



Wedding & Birthday Decoration



Showrooms



Mall

LED STRING LIGHT

LED String Lights that comes in an enchanting warm white brilliance and IP20 protection.

Details	Joylite Ganesh Ji	Joylite Swastik
Rated Wattage	3W	3W
Protection Class	IP20	IP20
Colour Temperature	Warm White	Warm White
Length	12feet	12feet
MRP (₹)	600	600
Std. Pkg.	50	50



APPLICATIONS



Festival Lighting



Wedding & Birthday Decoration



Showrooms



Mall

LED ROPE LIGHT

LED Rope Lights are easy to install into any shape as per requirement and comes with IP65 protection.

Details	LED Rope Light				
Rated Wattage	4W per meter	8W per meter	8W per meter	8W per meter	8W per meter
Number of LED Per Meter	60	120	120	120	120
Lumen	15000	30000	3000	6000	NA
CCT	6500K, 3000K Blue, Green, Pink	6500K, 3000K Blue	6500K, 3000K Blue, Green, Pink, Red	6500K, 3000K Blue, Green, Pink, Red	Tricolor-Saffron/White/Green
Length	50 meters	50 meters	5 meters	10 meters	Tiranga 15 meters
MRP (₹)	12500	15000	2000	3000	4000
Std. Pkg.	4	2	10	5	5



APPLICATIONS



Festival Lighting



Wedding & Birthday Decoration



Showrooms



Mall




ACCESSORIES

SURFACE MOUNTING RING FOR LED RECESS PANELS

LED Surface mounting rings offer to convert your LED Recess Panel Light to Surface Panels that can be directly mounted on the ceiling.

Details	Surface Mounting Ring for LED Recess Panel						
Rated Wattage	6W	12W	18W	10W	15W	20W	6W Rainbow
Shape	Round/Square		Round/Square			Round/Square	
Housing	Polycarbonate		Polycarbonate			Polycarbonate	
MRP (₹)	250	300	400	150	200	250	200
Std. Pkg.	20	20	20	20	20	20	20



ROPE LIGHT ADAPTER

Details	Rope Light Adapter 120 LED
Rated Wattage	400W
Power Factor	>0.90
MRP (₹)	300
Std. Pkg.	20



LED DRIVER

LED driver provides the 12V DC output voltage and is suitable to operate 12V DC devices like strip light, modules etc.

Details	24W, 12V/2A	60W, 12V/5A	72W, 12V/6A
Rated Wattage	24W	60W	72W
Output Voltage	12V	12V	12V
Output Current (Max.)	2A	5A	6A
Housing	Polycarbonate	Polycarbonate	Polycarbonate
Design	CV, CC	CV, CC	CV, CC
MRP (₹)	300	700	1000
Std. Pkg.	30	30	30



APPLICATIONS

- LED Drivers provide 12V DC output voltage and is suitable to operate devices like strip, modules etc.



HOME DECOR SERIES

DECO


● WALL LIGHT-UP DOWN

Enhance you interior and exterior with decorative range of up-down wall light, which give the perfect look to your wall.

Details	Wall light		
Rated Wattage	5W	10W	15W
Lumen	450	900	1350
Power Factor	>0.9	>0.9	>0.9
Colour Temperature	3000K/4000K/6500K Red/Blue/Green	3000K/4000K/6500K Red-Blue, Red-Green	3000K/4000K/6500K RGB
Protection Class	IP65	IP65	IP65
MRP (₹)	1000	1500	2500
Std. Pkg.	10	10	10

Rated Wattage	Length (A)	Width (B)	Height (C)
5W	86	62	36
10W	100	80	36
15W	153	80	41

All dimensions are in mm

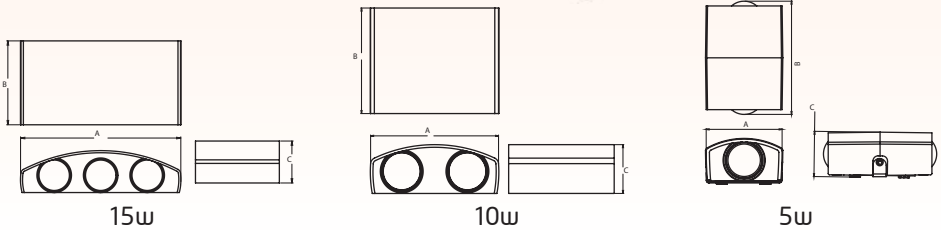

APPLICATIONS



Residences



Offices



Farmhouse

DECO

WALL LIGHT-K TYPE



Enhance your interior and exterior with decorative range of up-down wall light, which give the perfect look to your wall.

Details	Wall light	
Rated Wattage	3W	6W
Lumen	225	450
Power Factor	>0.5	>0.9
Colour Temperature	3000K/4000K/6500K	3000K/4000K/6500K
Protection Class	IP54	IP54
MRP (₹)	700	1000
Std. Pkg.	40	20



Rated Wattage	Length (A)	Width (B)	Height (C)
3W	81	81	70
6W	147	82	65

All dimensions are in mm

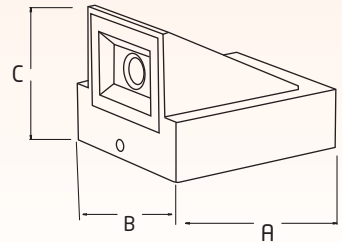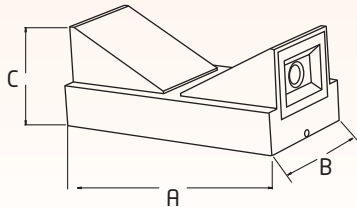

APPLICATIONS



Residences



Offices



Farmhouse

DECO CABINET LIGHT


Enhance your interior with decorative range of cabinet light which give the perfect look to home, office.

Details	Deco Cabinet light	
Rated Wattage	5W	10W
Lumen	400	800
Power Factor	>0.9	>0.9
Colour Temperature	3000K/4000K/6500K	3000K/4000K/6500K
Housing	Aluminum Die casting	Aluminum Die casting
MRP (₹)	600	700
Std. Pkg.	50	50



Rated Wattage	Length (A)	Width (B)	Height (C)
5W	295	17	8
10W	583	17	8

All dimensions are in mm



APPLICATIONS



Showrooms



Malls



Shelf Lighting



Residences

DECO



MUSHROOM-GATE LIGHT FIXTURE

Deco Mushroom can be used as Gate Pole lampshades and is made of unbreakable polycarbonate. It features screwless opening and a prismatic finish, which is made to withstand harsh weather conditions.

Details	Deco Mushroom
Rated Wattage	Up to 12W/14W
Finish	Prismatic
Shape	Mushroom
Size	200mm Diameter
Input Voltage(V)	220-240V AC
Mounting Arrangement	Pole, min. 50 to 60mm inner dia
Holder Base	B22d
Housing	Unbreakable Polycarbonate
Protection Class	IP 65
MRP (₹)	800
Std. Pkg.	12



Rated Wattage	Length (A)	Width (B)
12W 14W	225	225
All dimensions are in mm		

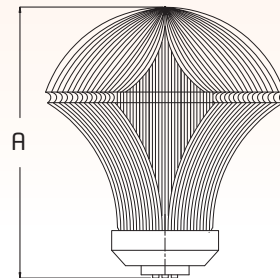

APPLICATIONS



Residences



Parks

DECO

● OVAL PRISMATIC-GATE LIGHT FIXTURE


Deco Oval Prismatic can be used as Gate Pole lampshade and is made of unbreakable polycarbonate. It features screwless opening and a prismatic finish which is made to withstand harsh weather conditions.

Details	Deco Oval 200 Prismatic	Deco Oval 150 Prismatic
Rated Wattage	Up to 12W/14W	Up to 9W
Finish	Prismatic	Prismatic
Shape	Oval	Oval
Size	200mm Diameter	150mm Diameter
Input Voltage(V)	220-240V AC	220-240V AC
Mounting Arrangement	Pole, min. 50 to 60mm inner dia	Pole, min. 50 to 60mm inner dia
Holder Base	B22d	B22d
Housing	Unbreakable Polycarbonate	Unbreakable Polycarbonate
Protection Class	IP 65	IP 65
MRP (₹)	800	600
Std. Pkg.	12	12



Rated Wattage	Size	Width (B)	Height (C)
9W	150 Prismatic	178	150
12W 14W	200 Prismatic	220	200

All dimensions are in mm

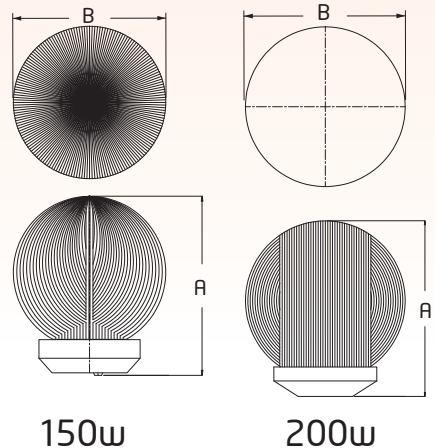

APPLICATIONS



Residences



Parks

DECO



● GLOBE FROSTED-GATE LIGHT FIXTURE

Deco Globe Frosted can be used as Gate Pole lamp shade and is made of unbreakable polycarbonate. It features screwless opening and a frosted finish which is made to withstand harsh weather conditions.

Details	Deco Globe 150 Frosted
Rated Wattage	Up to 9W
Finish	Frosted
Shape	Round
Size	150mm Diameter
Input Voltage(V)	220-240V AC
Mounting Arrangement	Pole, min. 50 to 60mm inner dia
Holder Base	B22d
Housing	Unbreakable Polycarbonate
Protection Class	IP 65
MRP (₹)	650
Std. Pkg.	12



Rated Wattage	Length (A)	Width (B)
9W	178	150
All dimensions are in mm		



APPLICATIONS



Residences



Parks

DECO



● WALL LIGHT GLOBE

Deco Wall Light Globe is made of unbreakable polycarbonate. It features screwless opening and frosted finish which makes it suitable for indoor Décor.

Details	Deco Wall Light Globe
Rated Wattage	Up to 9W
Finish	Frosted
Shape	Round
Size	150mm Diameter
Input Voltage(V)	220-240V AC
Mounting Arrangement	Wall Mount
Holder Base	B22d
Housing	Unbreakable Polycarbonate
Protection Class	IP 65
MRP (₹)	700
Std. Pkg.	12



Rated Wattage	Length (A)	Width (B)
9W	200	180
All dimensions are in mm		

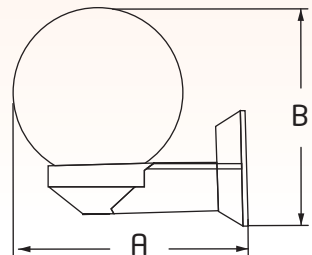

APPLICATIONS



Residences



Showrooms



Offices

DECO



● WALL LIGHT FROSTED

Deco Wall Light Frosted is suitable for indoor Décor. It features screwless opening and frosted finish which gives it a unique and stylish design.

Details	Deco Wall Light Frosted
Rated Wattage	Up to 9W
Finish	Frosted
Shape	Cylindrical
Size	110mm Diameter, 160mm height
Input Voltage(V)	220-240V AC
Mounting Arrangement	Wall Mount
Holder Base	B22d
Housing	Thermoplastic
Protection Class	IP 20
MRP (₹)	600
Std. Pkg.	12



Rated Wattage	Length (A)	Width (B)
9W	160	140
All dimensions are in mm		

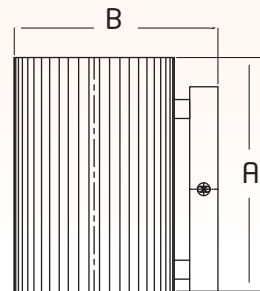

APPLICATIONS



Residences



Showrooms



Offices

BRANCH OFFICES

NORTH

Delhi	9654980990	raj.kumar@orientelectric.com
Ghaziabad	9643433824	deep.rastogi@orientelectric.com
Faridabad	7838550671	munish.kumar@orientelectric.com
Chandigarh	9216478812	sanjeev.talwar@orientelectric.com
Jammu	9216478812	sanjeev.talwar@orientelectric.com
Jaipur	9830600966	biplab.das@orientelectric.com
Lucknow	9554499666	ravi.kumar2@orientelectric.com
Rishikesh	8859014147	dinesh.chandra@orientelectric.com

WEST

Mumbai	7045779958	sanjay.shelar@orientelectric.com
Pune	9930511225	ajay.singh@orientelectric.com
Indore	7566201004	sunil.nahatkar@orientelectric.com
Nagpur	9370099100	arvind.shahu@orientelectric.com
Raipur	9977002729	manoj.thakur@orientelectric.com
Ahmedabad	9687682449	anand.deogharia@orientelectric.com

SOUTH

Bengaluru	9845229798	ananda.kumar@orientelectric.com
Chennai	9655467776	c.gopi@orientelectric.com
Madurai	9894087352	anguchamy.g@orientelectric.com
Secunderabad	9052899799	naveen.katta@orientelectric.com
Cochin	9745048800	madhu.s@orientelectric.com
Vijaywada	9642325967	n.srinivasan@orientelectric.com

EAST

Kolkata	9836643443	prabal.basu@orientelectric.com
Cuttack	9439157701	sudhansu.panigrahi@orientelectric.com
Patna	9934588650	abhay.kumar@orientelectric.com
Ranchi	9934545042	vikash.jaiswal@orientelectric.com
Guwahati	9435142707	ashis.dey@orientelectric.com

Terms and Conditions

MRP rates are inclusive of GST. These are the maximum recommended prices. However, dealers/retailers are free to sell below the maximum recommended prices.

The prices are subject to change without any prior notice.

All prices are subject to general terms and conditions of the company.

Disputes, if any, are subject to Delhi jurisdiction only.

This price list supersedes all previous price lists.

Every effort has been made to ensure accuracy in compilation of technical/commercial details within this publication. However, in case of a discrepancy, the management's decision shall be final.

Specifications and performance data are constantly changing; current details should, therefore, be checked with the company.

Displayed product images in the catalogue are only for indicative purposes and may differ from the actual product.

Lumen declared in catalogue is for Cool White (6000K/6500K) CCT at 220-240 Volts.



<https://www.orientelectric.com/pdf/clum.pdf>

Lighting Business Unit
Orient Electric Limited
42, Okhla Industrial Estate Phase
III, New Delhi 110020, India

Head Office
Orient Electric Limited
240, Okhla Industrial Area
Phase III, New Delhi-110020